

Catalog

Our Products Range [click below pictures for more details...](#)



No.	ITEM	PART NO.	Order No.	Parameter: Voltage(V) / Current(A) Rigid / Flexible conductor Dimension (mm)	PIC.	REF.
<p>How to get the Order No. Example: JUK2.5B Grey, Order No. is 100101002, If JUK2.5B BLack, add the color code, Order No. is 100101002BK</p>				Color →	Black: BK Orange: OG Beige: BG Blue: BU Yellow: YE Red: RD Green: GN	



JPTV Series Side Entry PUSH-IN Terminal Block
 1. Standard color: Gray, Blue, Orange.
 2. Other color and Logo can be customized.






















































1	new Push-in Side Entry Terminal Blocks Color	JPTV2.5	Grey: 100111001	800V/28A 0.14-4mm ² /0.14-4mm ² L49.4/H35.2/W5.2 mm		End cover: D-IPTV 2.5/4 Plug-in bridge: FBS2-5, 3-5, 4-5, 5-5, 10-5 Marker strip: ZB5
2	new Push-in Side Entry Ground Terminal Blocks	JPTV2.5-PE	Grey:100112001	0.14-4mm ² /0.14-4mm ² L49.4/H35.2/W5.2 mm		End cover: D-JPTV 2.5/4 Marker strip: ZB5
3	new End Cover	D-JPTV2.5/4	Grey:100206001	L49.4/H29.2/W2 mm		Match with: JPTV2.5










































JPT Series PUSH-IN Terminal Block
 1. Standard color: Gray, Blue, Orange, Green, Yellow.
 2. Other color and Logo can be customized.
 3. Products can be made with Diode.


































































4	Push-in Terminal Blocks Color 	JPT1.5/S	Grey:100105001	500V/17.5A 0.14-1.5mm ² /0.14-1.5mm ² L45/H31/W3.5 mm		End cover: D-JPT1.5/S Plug-in bridge: FBS10-3.5 Marker strip: ZB 3.5
5	Push-in Terminal Blocks Color 	JPT2.5	Grey:100105002	800V/31A 0.2-4mm ² /0.2-2.5mm ² L48.5/H35.5/W5.2 mm		End cover: D-IST1.5-2.5 Plug-in bridge: FBS2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZB5
6	new Push-in Diode Terminal Blocks Color 	JPT2.5-DT	Grey:100105026	800V/Current Depends on the Diode 0.2-4mm ² /0.2-2.5mm ² L48.5/H35.5/W5.2 mm		End cover: D-IST1.5-2.5 Plug-in bridge: FBS2-5, 3-5, 4-5, 5-5, 10-5 Marker strip: ZB 5
7	new Plug-in Terminal Blocks Color 	JPT2.5/1P	Grey:100105031	500V/24A 0.2-4mm ² /0.2-2.5mm ² L48.5/H35.5/W5.2 mm		End cover: D-IST1.5-2.5 Plug-in bridge: FBS2-5, 3-5, 4-5, 5-5, 10-5 Marker strip: ZB5
8	new Plug-in Double Level Terminal Blocks Color 	JPTTB2.5/2P	Grey:100105050	500V/22A 0.14-4mm ² /0.14-2.5mm ² L71.5/H46.5/W5.2 mm		End cover: D-JPTTB2.5/2P Plug-in bridge: FBS2-5, 3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM5
9	new Plug, 1seats Color 	JPPH2.5-1	Grey:100105037	500V/24A 0.14-4mm ² /0.14-2.5mm ² Yellow/Green color order number: 100105037PE 100105046PE		Match with: JPT 2.5/1P Marker strip: ZBFM5
10	Plug, 2seats Color 	JPPH2.5-2	Grey:100105038			
11	Plug, 3seats Color 	JPPH2.5-3	Grey:100105039			
12	Plug, 4seats Color 	JPPH2.5-4	Grey:100105040			
13	Plug, 5seats Color 	JPPH2.5-5	Grey:100105041			
14	Plug, 6seats Color 	JPPH2.5-6	Grey:100105042			
15	Plug, 7seats Color 	JPPH2.5-7	Grey:100105043			
16	Plug, 8seats Color 	JPPH2.5-8	Grey:100105044			
17	Plug, 9seats Color 	JPPH2.5-9	Grey:100105045			
18	Plug, 10seats Color 	JPPH2.5-10	Grey:100105046			
19	Push-in Terminal Blocks Color 	JPT4	Grey:100105003	800V/41A 0.2-6mm ² /0.2-4mm ² L56/H36.5/W6.2 mm		End cover: D-IST 4 Plug-in bridge: FBS2-6,3-6, 4-6, 5-6, 10-6 Marker strip: ZB6
20	Push-in Terminal Blocks Color 	JPT6	Grey:100105004	1000V/57A 0.5-10mm ² /0.5-6mm ² L57.7/H43.5/W8.2 mm		End cover: D-JPT6 Plug-in bridge: FBS2-8,3-8, 4-8, 5-8, 10-8 Marker strip: ZB8
21	Push-in Terminal Blocks Color 	JPT10	Grey:100105005	1000V/70A 0.5-16mm ² /0.5-10mm ² L67.7/H49.5/W10.2 mm		End cover: D-JPT10 Plug-in bridge: FBS2-10 Marker strip: ZB10
22	Push-in Terminal Blocks Color 	JPT16	Grey:100105006	1000V/90A 0.5-25mm ² /0.5-16mm ² L75.4/H52.6/W12.2 mm		End cover: D-JPT16 Plug-in bridge: FBS 2-12 Marker strip: ZB10
23	Push-in Twin Terminal Blocks Color 	JPT1.5/S-TW	Grey:100105007	500V/17.5A 0.14-1.5mm ² /0.14-1.5mm ² L54.5/H30.5/W3.5 mm		End cover: D-JPT1.5/S-TW Plug-in bridge: FBS 10-3.5 Marker strip: ZB3.5
24	Push-in Double Terminal Blocks Color 	JPT1.5/S-QU	Grey:100105010	500V/17.5A 0.14-1.5mm ² /0.14-1.5mm ² L63.8/H30.5/W3.5 mm		End cover: D-JPT1.5/S-QU Plug-in bridge: FBS 10-3.5 Marker strip: ZB 3.5
25	Push-in Twin Terminal Blocks Color 	JPT2.5-TW	Grey:100105008	800V/31A 0.2-4mm ² /0.2-2.5mm ² L60.5/H36.5/W5.2 mm		End cover: D-IST2.5-TW Plug-in bridge: FBS2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZB5
26	new Push-in Twin Diode Terminal Blocks Color 	JPT2.5-TW-DT	Grey:100105027	800V/Current Depends on the Diode 0.2-4mm ² /0.2-2.5mm ² L60.5/H36.5/W5.2 mm		End cover: D-IST2.5-TW Plug-in bridge: FBS2-5, 3-5, 4-5, 5-5, 10-5 Marker strip: ZB5
27	Push-in Double Terminal Blocks Color 	JPT2.5-QU	Grey:100105011	800V/31A 0.2-4mm ² /0.2-2.5mm ² L72.2/H36.5/W5.2 mm		End cover: D-IST2.5-QU Plug-in bridge: FBS2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZB5
28	new Push-in Double Diode Terminal Blocks Color 	JPT2.5-QU-DT	Grey:100105028	800V/Current Depends on the Diode 0.2-4mm ² /0.2-2.5mm ² L72.2/H36.5/W5.2 mm		End cover: D-IST2.5-QU Plug-in bridge: FBS2-5, 3-5, 4-5, 5-5, 10-5 Marker strip: ZB5
29	Push-in Twin Terminal Blocks Color 	JPT4-TW	Grey:100105009	800V/32A 0.2-6mm ² /0.25-4mm ² L66.5/H36.5/W6.2 mm		End cover: D-JPT4-TW Plug-in bridge: FBS2-6,3-6, 4-6, 5-6, 10-6 Marker strip: ZB6
30	Push-in Double Terminal Blocks Color 	JPT4-QU	Grey:100105012	800V/32A 0.2-6mm ² /0.25-4mm ² L77/H36.5/W6.2 mm		End cover: D-JPT4-QU Plug-in bridge: FBS2-6,3-6, 4-6, 5-6, 10-6 Marker strip: ZB 6
31	new Push-in Twin Terminal Blocks Color 	JPT6-TW	Grey:100105035	1000V/52A 0.5-10mm ² /0.5-6mm ² L75.2/H43/W8.2 mm		End cover: D-JPT6-TW Plug-in bridge: FBS2-8, 3-8, 4-8, 5-8, 10-8 Marker strip: ZB8
32	new Push-in Twin Terminal Blocks Color 	JPT6-QU	Grey:100105036	1000V/52A 0.5-10mm ² /0.5-6mm ² L91.9/H43/W8.2 mm		End cover: D-JPT6-QU Plug-in bridge: FBS 2-8, 3-8, 4-8, 5-8, 10-8 Marker strip: ZB 8
33	Push-in Double Level Terminal Blocks Color 	JPTTB1.5/S	Grey:100105013	500V/16A 0.14-1.5mm ² /0.14-1.5mm ² L65.7/H40.8/W3.5 mm		End cover: D-JPTTB 1.5 Plug-in bridge: FBS10-3.5 Marker strip: ZBFM3.5




















34	Push-in Double Level Terminal Blocks, with equipotential bonder Color 	JPTTB1.5/S-PV	Grey:100105014	500V/16A 0.14-1.5mm ² /0.14-1.5mm ² L65.7/H40.8/W3.5 mm		End cover: D-JPTTB1.5 Plug-in bridge: FBS10-3.5 Marker strip: ZBFM3.5
35	Push-in Double Level Terminal Blocks Color 	JPTTB2.5	Grey:100105015	500V/26A 0.14-4mm ² /0.14-2.5mm ² L68.8/H46/W5.2 mm		End cover: D-JPTTB2.5 Plug-in bridge: FBS2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM5
36	Push-in Double Level Terminal Blocks, with equipotential bonder Color 	JPTTB2.5-PV	Grey:100105016	500V/26A 0.14-4mm ² /0.14-2.5mm ² L68.8/H46/W5.2 mm		End cover: D-JPTTB2.5 Plug-in bridge: FBS2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM5
	Push-in Double Level Diode Terminal Blocks Color 	JPTTB2.5-DT	Grey:100105029	500V/Current Depends on the Diode 0.14-4mm ² /0.14-2.5mm ² L68.8/H46/W5.2 mm		End cover: D-JPTTB2.5 Plug-in bridge: FBS2-5, 3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM5
38	Push-in Double Level Terminal Blocks Color 	JPTTB4	Grey:100105017	500V/32A 0.2-6mm ² /0.2-4mm ² L84.3/H46/W6.2 mm		End cover: D-JPTTB4 Plug-in bridge: FBS2-6,3-6, 4-6, 5-6, 10-6 Marker strip: ZBFM6
39	Push-in Double Level Terminal Blocks, with equipotential bonder Color 	JPTTB4-PV	Grey:100105018	500V/32A 0.2-6mm ² /0.2-4mm ² L84.3/H46/W6.2 mm		End cover: D-JPTTB4 Plug-in bridge: FBS2-6,3-6, 4-6, 5-6, 10-6 Marker strip: ZBFM6
	Push-in Triple Level Terminal Blocks Color 	JPT1.5/S-3L	Grey:100105019	500V/15A 0.14-1.5mm ² /0.14-1.5mm ² L97.7/H51.5/W3.5mm		End cover: D-JPT 1.5-3L Plug-in bridge: FBS2-3.5, 3-3.5, 4-3.5, 5-3.5, 10-3.5 Marker strip: ZBFM3.5
	Push-in Triple Level Terminal Blocks, with equipotential bonder Color 	JPT1.5/S-3L-PV	Grey:100105020	500V/15A 0.14-1.5mm ² /0.14-1.5mm ² L97.7/H51.5/W3.5mm		End cover: D-JPT 1.5-3L Plug-in bridge: FBS2-3.5, 3-3.5, 4-3.5, 5-3.5, 10-3.5 Marker strip: ZBFM3.5
42	Push-in Triple Level Terminal Blocks Color 	JPT2.5-3L	Grey:100105021	500V/22A 0.14-4mm ² /0.14-2.5mm ² L102.7/H56.6/W5.2 mm		End cover: D-JPT 2.5-3L Plug-in bridge: FBS2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM5
43	Push-in Triple Level Terminal Blocks, with equipotential bonder Color 	JPT2.5-3L-PV	Grey:100105022	500V/22A 0.14-4mm ² /0.14-2.5mm ² L102.7/H56.6/W5.2 mm		End cover: D-JPT 2.5-3L Plug-in bridge: FBS2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM5
44	Push-in Triple Level Terminal Blocks with bottom layer grounding Color 	JPT2.5-PE/L/N	Grey:100105030	500V/22A 0.14-4mm ² /0.14-2.5mm ² L102.7/H56.6/W5.2 mm		End cover: D-JPT 2.5-3L Plug-in bridge: FBS2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM5
	Push-in FUSE Terminal Blocks	JPT4-HESI	Grey:100105023	500V/6.3A 0.2-6mm ² /0.25-4mm ² L56/H64.8/W6.2 mm		Plug-in bridge: FBS2-6, 3-6, 4-6, 5-6, 10-6. Marker strip: ZBFM 6 Extra fee for fuse: \$0.024 0.5, 1, 2, 3, 4, 5, 6, 8, 10A, etc
	Push-in FUSE Terminal Blocks With LED	JPT4-HESILED	24V Grey: 100105052 220V Grey: 100105053	500V/6.3A 0.2-6mm ² /0.25-4mm ² L56/H64.8/W6.2 mm		Plug-in bridge: FBS2-6, 3-6, 4-6, 5-6, 10-6. Marker strip: ZBFM 6 With LED: 24VDC, 230VAC Extra fee for fuse: \$0.024 0.5, 1, 2, 3, 4, 5, 6, 8, 10A, etc
	Knife Disconnect Terminal Blocks	JPT4-MT	Grey:100105051	500V/20A 0.2-6mm ² /0.25-4mm ² L56/H36.5/W6.2 mm		End cover: D-JST4 Plug-in bridge: FBS2-6, 3-6, 4-6, 5-6, 10-6 Marker strip: ZBFM6
48	Push-in Ground Terminal Blocks	JPT1.5/S-PE	100106001	0.14-1.5mm ² /0.14-1.5mm ² L45/H31/W3.5 mm		End cover: D-JPT1.5/S Marker strip: ZB3.5
49	Push-in Ground Terminal Blocks	JPT2.5-PE	100106002	0.2-4mm ² /0.2-2.5mm ² L48.5/H35.5/W5.2 mm		End cover: D-JST2.5 Marker strip: ZB5
	Plug-in Ground Terminal Blocks	JPT2.5/1P-PE	100106019	0.2-4mm ² /0.2-2.5mm ² L48.5/H35.5/W5.2 mm		End cover: D-JST1.5-2.5 Marker strip: ZB5
	Plug-in Ground Double Level Terminal Blocks	JPTTB2.5/2P-PE	100106021	0.14-4mm ² /0.14-2.5mm ² L71.5/H46.5/W5.2 mm		End cover: D-JPTTB2.5/2P Marker strip: ZBFM5
52	Push-in Ground Terminal Blocks	JPT4-PE	100106003	0.2-6mm ² /0.2-4mm ² L56/H36.5/W6.2 mm		End cover: D-JST4 Marker strip: ZB6
53	Push-in Ground Terminal Blocks	JPT6-PE	100106004	0.5-10mm ² /0.5-6mm ² L57.7/H43.5/W8.2 mm		End cover: D-JPT6 Marker strip: ZB8
54	Push-in Ground Terminal Blocks	JPT10-PE	100106005	0.5-16mm ² /0.5-10mm ² L67.7/H49.5/W10.2 mm		End cover: D-JPT10 Marker strip: ZB10
55	Push-in Ground Terminal Blocks	JPT16-PE	100106006	0.5-25mm ² /0.5-16mm ² L75.4/H52.6/W12.2 mm		End cover: D-JPT16 Marker strip: ZB10

56	Push-in Ground Twin Terminal Blocks	JPT1.5/S-TW-PE	100106007	0.14-1.5mm ² /0.14-1.5mm ² L54.5/H30.5/W3.5 mm		End cover: D-JPT1.5/S-TW Marker strip: ZB3.5
57	Push-in Ground Double Terminal Blocks	JPT1.5/S-QU-PE	100106010	0.14-1.5mm ² /0.14-1.5mm ² L63.8/H30.5/W3.5 mm		End cover: D-JPT1.5/S-QU Marker strip: ZB3.5
58	Push-in Ground Twin Terminal Blocks	JPT2.5-TW-PE	100106008	0.2-4mm ² /0.2-2.5mm ² L60.5/H36.5/W5.2 mm		End cover: D-JST2.5-TW Marker strip: ZB5
59	Push-in Ground Double Terminal Blocks	JPT2.5-QU-PE	100106011	0.2-4mm ² /0.2-2.5mm ² L72.2/H36.5/W5.2 mm		End cover: D-JST2.5-QU Marker strip: ZB5
60	Push-in Ground Twin Terminal Blocks	JPT4-TW-PE	100106009	0.2-6mm ² /0.25-4mm ² L66.5/H36.5/W6.2 mm		End cover: D-JPT4-TW Marker strip: ZB6
61	Push-in Ground Double Terminal Blocks	JPT4-QU-PE	100106012	0.2-6mm ² /0.25-4mm ² L77/H36.5/W6.2 mm		End cover: D-JPT4-QU Marker strip: ZB6
62	Push-in Ground Double Terminal Blocks	JPT6-TW-PE	100106016	0.5-10mm ² /0.5-6mm ² L75.2/H43/W8.2 mm		End cover: D-JPT6-TW Marker strip: ZB8
63	Push-in Ground Double Terminal Blocks	JPT6-QU-PE	100106017	0.5-10mm ² /0.5-6mm ² L91.9/H43/W8.2 mm		End cover: D-JPT6-QU Marker strip: ZB8
64	Push-in Ground Double Level Terminal Blocks	JPTTB1.5/S-PE	100106013	0.14-1.5mm ² /0.14-1.5mm ² L65.7/H40.8/W3.5 mm		End cover: D-JPTTB1.5 Marker strip: ZBFM3.5
65	Push-in Ground Double Level Terminal Blocks	JPTTB2.5-PE	100106014	0.14-4mm ² /0.14-2.5mm ² L68.8/H46/W5.2 mm		End cover: D-JPTTB2.5 Marker strip: ZBFM5
66	Push-in Ground Double Level Terminal Blocks	JPTTB4-PE	100106018	0.2-6mm ² /0.2-4mm ² L68.8/H46/W5.2 mm		End cover: D-JPTTB4 Marker strip: ZBFM6
67	Push-in Ground Triple Level Terminal Blocks	JPT1.5/S-3L-PE	100106020	0.14-1.5mm ² /0.14-1.5mm ² L97.7/H51.5/W3.5mm		End cover: D-JPT1.5-3L Marker strip: ZBFM3.5
68	Push-in Ground Triple Level Terminal Blocks	JPT2.5-3L-PE	100106015	0.14-4mm ² /0.14-2.5mm ² L102.7/H56.6/W5.2 mm		End cover: D-JPT2.5-3L Marker strip: ZBFM5
69	End Cover	D-JPT1.5/S	Grey:100203001	L45/H24.6/W2.2mm		Match with: JPT1.5/S
70	End Cover	D-JPT1.5/S-TW	Grey:100203005	L54.5/H24.6/W2.2mm		Match with: JPT1.5/S-TW
71	End Cover	D-JPT1.5/S-QU	Grey:100203013	L63.8/H24.6/W2.2mm		Match with: JPT1.5/S-QU
72	End Cover	D-JPT4-TW	Grey:100203006	L77/H26.2/W2.2mm		Match with: JPT4-TW
73	End Cover	D-JPT4-QU	Grey:100203007	L56/H29/W2.2mm		Match with: JPT4-QU
74	End Cover	D-JPT6-TW	Grey:100203014	L75.2/H36.3/W2.2mm		Match with: JPT6-TW
75	End Cover	D-JPT6-QU	Grey:100203015	L91.9/H36.3/W2.2mm		Match with: JPT6-QU
76	End Cover	D-JPTTB1.5/S	Grey:100203008	L65.7/H40.5/W1.9mm		Match with: JPTTB1.5/S
77	End Cover	D-JPTTB2.5	Grey:100203009	L68.8/H40/W2.2mm		Match with: JPTTB2.5

78	End Cover	D-JPTTB2.5/2P	Grey:100203018	L73/H41/W2mm		Match with: JPTTB2.5/2P
79	End Cover	D-JPTTB4	Grey:100203010	L83.6/H40.1/W2mm		Match with: JPTTB4
80	End Cover	D-JPT6	Grey:100203002	L57.7/H36/W2.2 mm		Match with: JPT6
81	End Cover	D-JPT10	Grey:100203003	L67.7/H42.6/W2.2 mm		Match with: JPT10
82	End Cover	D-JPT16	Grey:100203004	L75.4/H45.6/W/2.2 mm		Match with: JPT16
83	End Cover	D-JPT1.5/S-3L	Grey:100203017	L97.7/H45.2/W/1.9 mm		Match with: JPT1.5/S-3L
84	End Cover	D-JPT2.5-3L	Grey:100203011	L103/H51/W2 mm		Match with: JPT2.5-3L
85	Smaller Partition Plate	ATP-JST/JPT-S	Grey:100203016	L70/H38.6/W0.8 mm		Match with: JPT1.5/S, JPT1.5/S-TW, JPT1.5/S-QU, JPT2.5, JPT4, JST1.5, JST2.5, JPTV2.5, JPTV2.5-PE
86	Partition Plate	ATP-JST/JPT	Grey:100203012	L98.5/H50.7/W0.8 mm		Match with JPT, JST Series
87	Plug-in Bridge, 2seats	FBS2-3.5	100212002	L5.7/H18.4/W3.1mm		Match With: JPT1.5/S, JPT1.5/S-TW, JPT1.5/S-QU, JPTTB1.5/S, JPTTB1.5/S-PV
88	Plug-in Bridge, 3seats	FBS3-3.5	100212003	L9.2/H18.4/W3.1mm		
89	Plug-in Bridge, 5seats	FBS5-3.5	100212005	L16.2/H18.4/W3.1mm		
90	Plug-in Bridge, 10seats	FBS10-3.5	100212001	L33.7/H18.4/W3.1mm		
91	Other detail list of FBS bridges in JST series, other detail list of ZB marker strips in JUK series.					
92	Simple Test Disconnect Terminal Blocks					
93	Push-in Connection Relay base (No plug-in relay)	JBPT1.5	Base:101001001	250V AC/DC /8A 0.14-1.5mm ² /0.14-1.5mm ² L93/H78/W6.2 mm		Plug-in bridge: FBS2-6.3-6, 4-6, 5-6, 10-6 Marker strip: ZB6
94	Push-in Connection Relay Module with plug-in miniature relay Available in 12V, 24V	JBPT1.5 with Relay	12V: 101002006 24V: 101002007	250V AC/DC /6A 0.14-1.5mm ² /0.14-1.5mm ² L93/H78/W6.2 mm		Plug-in bridge: FBS2-6.3-6, 4-6, 5-6, 10-6 Marker strip: ZB6
95	Push-in Connection Relay base (No plug-in relay)	JAPT1.5	Base:101001002	250V AC/DC /6A 0.14-1.5mm ² /0.14-1.5mm ² L93/H78/W6.2 mm		Plug-in bridge: FBS2-6.3-6, 4-6, 5-6, 10-6 Marker strip: ZB6
96	Push-in Connection Relay Module with plug-in miniature relay Available in 12V, 24V	JAPT1.5 with Relay	12V: 101002009 24V: 101002010	250V AC/DC /6A 0.14-1.5mm ² /0.14-1.5mm ² L93/H78/W6.2 mm		Plug-in bridge: FBS2-6.3-6, 4-6, 5-6, 10-6 Marker strip: ZB6
97	Push-in Connection Relay base (No plug-in relay)	JTRP1.5	Base:101099001	250V AC/DC /6A 0.14-1.5mm ² /0.14-1.5mm ² L93/H78/W6.2 mm		Plug-in bridge: LBS20-1.5 Marker strip: ZB6
98	Push-in Connection Relay Module with plug-in miniature relay Available in 12V, 24V	JTRP1.5 with Relay	12V: 101002012 24V: 101002013	250V AC/DC /6A 0.14-1.5mm ² /0.14-1.5mm ² L93/H78/W6.2 mm		Plug-in bridge: LBS20-1.5 Marker strip: ZB6
99	Screw Connection Relay base (No plug-in relay)	JTRS1.5	Base:101003001	250V AC/DC /6A 0.14-1.5mm ² /0.14-1.5mm ² L93/H78/W6.2 mm		Plug-in bridge: LBS20-1.5 Marker strip: ZB6
100	Screw Connection Relay Module with plug-in miniature relay Available in 12V, 24V	JTRS1.5 with Relay	12V: 101002015 24V: 101002016	250V AC/DC /6A 0.14-1.5mm ² /0.14-1.5mm ² L93/H78/W6.2 mm		Plug-in bridge: LBS20-1.5 Marker strip: ZB6

101	20 Seats Plug-in Bridge	LBS20-1.5	101099001	For JTRP1.5/JTRS1.5 only		
						
102	Spring-cage Terminal Blocks Color 	JST1.5	Grey:100103001	500V/17.5A 0.14-1.5mm ² /0.14-1.5mm ² L49/H36/W4.2 mm		End cover: D-IST1.5-2.5 Plug-in bridge: FBS10-4 Marker strip: ZB4
103	Spring-cage Terminal Blocks Color 	JST2.5	Grey:100103002	800V/31A 0.2-4mm ² /0.2-2.5mm ² L49/H35.5/W5.2 mm		End cover: D-IST1.5-2.5 Plug-in bridge: FBS2-5.3-5.4-5.5-10-5 Marker strip: ZB5
104	 Spring-cage Diode Terminal Blocks Color 	JST2.5-DT	Grey:100103018	800V/Current Depends on the Diode 0.2-4mm ² /0.2-2.5mm ² L49/H35.5/W5.2 mm		End cover: D-IST1.5-2.5 Plug-in bridge: FBS2-5.3-5.4-5.5-10-5 Marker strip: ZB5
105	Spring-cage Terminal Blocks Color 	JST4	Grey:100103003	800V/41A 0.5-6mm ² /0.5-4mm ² L56.5/H35.5/W6.2 mm		End cover: D-IST4 Plug-in bridge: FBS2-6.3-6.4-6.5-6.10-6 Marker strip: ZB6
106	Spring-cage Terminal Blocks Color 	JST6	Grey:100103004	800V/57A 0.5-10mm ² /0.5-6mm ² L70/H43/W8.2 mm		End cover: D-IST6 Plug-in bridge: FBS2-8.3-8.4-8.5-8.10-8 Marker strip: ZB8
107	Spring-cage Terminal Blocks Color 	JST10	Grey:100103005	1000V/57A 0.5-16mm ² /0.5-10mm ² L71.5/H49.5/W10.2 mm		End cover: D-IST10 Plug-in bridge: FBS2-10 Marker strip: ZB10
108	Spring-cage Terminal Blocks Color 	JST16	Grey:100103021	1000V/90A 0.2-25mm ² /0.2-16mm ² L80.2/H51/W12.2 mm		End cover: D-IST16 Plug-in bridge: FBS2-12 Marker strip: ZB12
109	Spring-cage Terminal Blocks Color 	JST35	Grey:100103027	1000V/125A 0.2-35mm ² /0.2-35mm ² L100/H58.9/W16.2 mm		End cover: D-IST35 Plug-in bridge: FBS2-16 Marker strip: ZB12
110	Spring-cage Twin Terminal Blocks Color 	JST1.5-TW	Grey:100103025	500V/17.5A 0.08-1.5mm ² /0.08-1.5mm ² L60.9/H36/W4.2mm		End cover: D-IST1.5-TW Plug-in bridge: FBS10-4 Marker strip: ZB4
111	Spring-cage Twin Terminal Blocks Color 	JST2.5-TW	Grey:100103006	800V/31*A 0.2-4mm ² /0.2-2.5mm ² L61/H36/W5.2 mm		End cover: D-IST2.5-TW Plug-in bridge: FBS2-5.3-5.4-5.5-10-5 Marker strip: ZB5
112	 Spring-cage Twin Diode Terminal Blocks Color 	JST2.5-TW-DT	Grey:100103019	800V/Current Depends on the Diode 0.2-4mm ² /0.2-2.5mm ² L61/H36/W5.2 mm		End cover: D-IST2.5-3 Plug-in bridge: FBS2-5.3-5.4-5.5-10-5 Marker strip: ZB5
113	Spring-cage Twin Terminal Blocks Color 	JST4-TW	Grey:100103007	800V/32*A 0.5-6mm ² /0.5-4mm ² L71.5/H36.5/W6.2 mm		End cover: D-IST4-TW Plug-in bridge: FBS2-6.3-6.4-6.5-6.10-6 Marker strip: ZB6
114	Spring-cage Double Terminal Blocks Color 	JST1.5-QU	Grey:100103026	500V/17.5A 0.08-1.5mm ² /0.08-1.5mm ² L72.9/H36/W4.2mm		End cover: D-IST2.5-QU Plug-in bridge: FBS 10-4 Marker strip: ZB4
115	Spring-cage Double Terminal Blocks Color 	JST2.5-QU	Grey:100103008	800V/30*A 0.2-4mm ² /0.2-2.5mm ² L72.5/H35.5/W5.2 mm		End cover: D-IST2.5-QU Plug-in bridge: FBS2-5.3-5.4-5.5-10-5 Marker strip: ZB 5
116	 Spring-cage Double Diode Terminal Blocks Color 	JST2.5-QU-DT	Grey:100103020	800V/Current Depends on the Diode 0.2-4mm ² /0.2-2.5mm ² L72.5/ H35.5/W5.2 mm		End cover: D-IST2.5-QU Plug-in bridge: FBS 2-5.3-5.4-5.5-10-5 Marker strip: ZB 5
117	Spring-cage Double Terminal Blocks Color 	JST4-QU	Grey:100103009	800V/40*A 0.5-6mm ² /0.5-4mm ² L87/H36/W6.2 mm		End cover: D-IST4-QU Plug-in bridge: FBS 2-6.3-6.4-6.5-6.10-6 Marker strip: ZB6
118	Spring-cage Double Level Terminal Blocks Color 	JSTTB2.5	Grey:100103010	500V/24A 0.2-4mm ² /0.2-2.5mm ² L68/H46/W5.2 mm		End cover: D-ISTTB2.5 Plug-in bridge: FBS2-5.3-5.4-5.5-10-5 Marker strip: ZBFM5
119	Spring-cage Double Level Diode Terminal Blocks Color 	JSTTB2.5-DT	Grey:100103024	500V/Current Depends on the Diode 0.2-4mm ² /0.2-2.5mm ² L68/H46/W5.2 mm		End cover: D-ISTTB2.5 Plug-in bridge: FBS2-5.3-5.4-5.5-10-5 Marker strip: ZBFM 5






























120	Spring-cage Double Level Terminal Blocks, with equipotential bonder Color 	JSTTB2.5-PV	Grey:100103011	500V/24A 0.2-4mm ² /0.2-2.5mm ² L68/H46/W5.2 mm		End cover: D-JSTTB2.5 Plug-in bridge: FBS2-5.3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM5
121	Spring-cage Double Level Terminal Blocks Color 	JSTTB4	Grey:100103022	500V/32A 0.08-6mm ² /0.08-4mm ² L84.4/H46.3/W6.2 mm		End cover: D-JSTTB4 Plug-in bridge: FBS2-6, 3-6, 4-6, 5-6, 10-6 Marker strip: ZBFM6
122	Spring-cage Double Level Terminal Blocks, with equipotential bonder Color 	JSTTB4-PV	Grey:100103023	500V/32A 0.08-6mm ² /0.08-4mm ² L84.4/H46.3/W6.2 mm		End cover: D-JSTTB2.5 Plug-in bridge: FBS2-5.3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM6
123	Spring-cage Three Level Terminal Blocks Color 	JST2.5-3L	Grey:100103012	500V/28A 0.2-4mm ² /0.2-2.5mm ² L99.5/H57/W5.2 mm		End cover: D-JST2.5-3L Plug-in bridge: FBS2-5.3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM5
124	Spring-cage Three Level Terminal Blocks, with equipotential bonder Color 	JST2.5-3L-PV	Grey:100103013	500V/28A 0.2-4mm ² /0.2-2.5mm ² L99.5/H57/W5.2 mm		End cover: D-JST2.5-3L Plug-in bridge: FBS2-5.3-5, 4-5, 5-5, 10-5 Marker strip: ZBFM5
125	Spring-cage Three Level Terminal Blocks	JDLD2.5-3VN	Grey:100103014	500V/20A 0.2-4mm ² /0.2-2.5mm ² L110.5/H69.5/W5.2 mm		End cover: D-JDL D2.5-3VN
126	Fuse Terminal Blocks With Disconnect Lever Color 	JST4-HESI	Grey:100103015	300V6.3A 0.08-6mm ² /0.8-4mm ² L61.5/H62.5/W5.2 mm		Plug-in bridge: FBS2-6,3-6, 4-6, 5-6,10-6 Marker strip: ZB6, ZBFM6 Extra fee for fuse: \$0.024 0.5, 1, 2,,3, 4, 5 ,6, 8, 10A, etc
127	Fuse Terminal Blocks With Disconnect Lever with LED Color 	JST4-HESILED	24V Grey: 100103016 220V Grey: 100103028	300V6.3A 0.08-6mm ² /0.8-4mm ² L61.5/H62.5/W5.2 mm		Plug-in bridge: FBS2-6,3-6, 4-6, 5-6,10-6 Marker strip: ZB6, ZBFM6 With LED:24VDC,230VAC Extra fee for fuse: \$0.024 0.5, 1, 2,,3, 4, 5 ,6, 8, 10A, etc
128	Knife Disconnect Terminal Blocks	JST4-MT	Grey:100103017	400V/20A 0.08-6mm ² /0.08-4mm ² L61.5/H36.5/W6.2 mm		Plug-in bridge: FBS2-6, 3-6, 4-6, 5-6, 10-6 Marker strip: ZBFM6
129	Spring-cage Ground Terminal Blocks	JST1.5-PE	100104001	0.14-1.5mm ² /0.14-1.5mm ² L49.2/H36/W4.2 mm		End cover: D-JST1.5-2.5 Marker strip: ZB4
130	Spring-cage Ground Terminal Blocks	JST2.5-PE	100104002	0.2-4mm ² /0.2-2.5mm ² L49/H35.5/W5.2 mm		End cover: D-JST2.5 Marker strip: ZB5
131	Spring-cage Ground Terminal Blocks	JST4-PE	100104003	0.5-6mm ² /0.5-4mm ² L56.5/H35.5/W6.2 mm		End cover: D-JST4 Marker strip: ZB6
132	Spring-cage Ground Terminal Blocks	JST6-PE	100104004	0.5-10mm ² /0.5-6mm ² L70/H43/W8.2 mm		End cover: D-JST6 Marker strip: ZB8
133	Spring-cage Ground Terminal Blocks	JST10-PE	100104005	0.5-16mm ² /0.5-10mm ² L71.5/H49.5/W10.2 mm		End cover: D-JST10 Marker strip: ZB10
134	 Spring-cage Ground Terminal Blocks	JST16-PE	100104011	0.2-25mm ² /0.2-16mm ² L80.2/H51/W12.2 mm		End cover: D-JST16 Marker strip: ZB12
135	 Spring-cage Ground Terminal Blocks	JST35-PE	100104013	0.2-35mm ² /0.2-35mm ² L100/H58.9/W16.2 mm		End cover: D-JST35 Marker strip: ZB12
136	Spring-cage Twin Ground Terminal Blocks	JST1.5-TW-PE	100104014	0.08-1.5mm ² /0.08-1.5mm ² L60.9/H36/W4.2mm		End cover: D-JST2.5-TW Marker strip: ZB4
137	Spring-cage Twin Ground Terminal Blocks	JST2.5-TW-PE	100104006	0.2-4mm ² /0.2-2.5mm ² L61/H36/W5.2 mm		End cover: D-JST2.5-TW Marker strip: ZB5
138	Spring-cage Twin Ground Terminal Blocks	JST4-TW-PE	100104007	0.5-6mm ² /0.5-4mm ² L71.5/H36.5/W6.2 mm		End cover: D-JST4-TW Marker strip: ZB6
139	Spring-cage Double Ground Terminal Blocks	JST1.5-QU-PE	100104015	0.08-1.5mm ² /0.08-1.5mm ² L72.9/H36/W4.2mm		End cover: D-JST2.5-QU Marker strip: ZB4
140	Spring-cage Double Ground Terminal Blocks	JST2.5-QU-PE	100104008	0.2-4mm ² /0.2-2.5mm ² L72.5/H35.5/W5.2 mm		End cover: D-JST2.5-QU Marker strip: ZB5
141	Spring-cage Double Ground Terminal Blocks	JST4-QU-PE	100104009	0.5-6mm ² /0.5-4mm ² L87/H36/W6.2 mm		End cover: D-JST4-QU Marker strip: ZB6




















142	Spring-cage Two Level Ground Terminal Blocks	JSTTB2.5-PE	100104010	0.2-4mm ² /0.2-2.5mm ² L68/H46/W5.2 mm		End cover: D-JSTTB2.5 Marker strip: ZBEM5
143	Spring-cage Two Level Ground Terminal Blocks	JSTTB4-PE	100104012	0.08-6mm ² /0.08-4mm ² L84.4/H46.3/W6.2 mm		End cover: D-JSTTB4 Marker strip: ZBFM6
144	End Cover	D-JST1.5-2.5	Grey:100202001	L49.2/H30/W2.2 mm		Match with: JST1.5, JST2.5
145	End Cover	D-JST4	Grey:100202002	L56.5/H30/W2.2 mm		Match with: JST4
146	End Cover	D-JST6	Grey:100202003	L70/H36.6/W2.2 mm		Match with: JST6
147	End Cover	D-JST10	Grey:100202004	L71.5/H43/W2.3 mm		Match with: JST10
148	End Cover	D-JST16	Grey:100202012	L80.2/H43.7/W2.2 mm		Match with: JST16
149	End Cover	D-JST2.5-TW	Grey:100202005	L61/H29.5/W2.2 mm		Match with: JST2.5-TW
150	End Cover	D-JST2.5-QU	Grey:100202007	L72/H29.5/W2.2 mm		Match with: JST2.5-QU
151	End Cover	D-JST4-TW	Grey:100202006	L72/H29.4/W2.2 mm		Match with: JST4-TW
152	End Cover	D-JST4-QU	Grey:100202008	L87.5/H29.6/W2.2 mm		Match with: JST4-QU
153	End Cover	D-JSTTB2.5	Grey:100202009	L68/H40/W2.2 mm		Match with: JSTTB2.5
154	End Cover	D-JSTTB4	Grey:100202013	L84.5/H40.1/W2 mm		Match with: JSTTB4
155	End Cover	D-JST2.5-3L	Grey:100202010	L99/H51/W2.2 mm		Match with: JST2.5-3L
156	End Cover	D-JDL2.5-3VN	100202011	L109.7/H57.6/W1.5 mm		Match with: JDL2.5-3VN
157	Plug-in Bridge 10 Seats	FBS10-4	100212006	L41/H22.6/W3.4 mm		Bridge for : JST1.5
158	Plug-in Bridge, 2 seats	FBS2-5	100212012	L11/H22.8/W3.1 mm		Bridge for: JST/JPT2.5 JST/JPT2.5-TW JST/JPT2.5-QU JSTTB/JPTTB2.5 JST/JPT2.5-3L
159	Plug-in Bridge, 3 seats	FBS3-5	100212013	L14.2/H22.8/W3.1 mm		
160	Plug-in Bridge, 4 seats	FBS4-5	100212014	L20.6/H22.8/W3.1 mm		
161	Plug-in Bridge, 5 seats	FBS5-5	100212015	L24.7/H22.8/W3.1 mm		
162	Plug-in Bridge, 10 seats	FBS10-5	100212011	L50.6/H22.8/W3.1 mm		
163	Plug-in Bridge, 2 seats	FBS2-6	100212017	L11/H22.8/W3.1 mm		
164	Plug-in Bridge, 3 seats	FBS3-6	100212018	L12.1/H22.8/W3.1 mm		Bridge for: JST/JPT4 JST/JPT4-TW JST/JPT4-QU
165	Plug-in Bridge, 4 seats	FBS4-6	100212019	L23.3/H22.8/W3.1 mm		
166	Plug-in Bridge, 5 seats	FBS5-6	100212020	L30.5/H22.8/W3.1 mm		
167	Plug-in Bridge, 10 seats	FBS10-6	100212016	L60.1/H22.8/W3.1 mm		
168	Plug-in Bridge, 2 seats	FBS2-8	100212022	L14.8/H30.8/W3.3 mm		
169	Plug-in Bridge, 3 seats	FBS3-8	100212023	L23/H30.8/W3.3 mm		








170	Plug-in Bridge, 4 seats	FBS4-8	10021204	L31.2/H30.8/W3.3 mm		Bridge for : JST/JPT6
171	Plug-in Bridge, 5 seats	FBS5-8	10021205	L40.5/H30.8/W3.3 mm		
172	Plug-in Bridge, 10 seats	FBS10-8	10021201	L80.4/H30.8/W3.3 mm		
173	Plug-in Bridge, 2 seats	FBS2-10	10021206	L18/H35.1/W4.2 mm		Bridge for: JST/JPT10
174	Plug-in Bridge, 2 seats	FBS2-12	10021207	L20.5/H35.8/W5.3 mm		Bridge for: JST/JPT16
175	Plug-in Bridge, 2 seats	FBS2-16	10021208	L25.4/H43.6/W5.8 mm		Bridge for: JST/JPT/JUT 35







































176	Universal Terminal Blocks Color	JUK1.5N	Grey:100101001	690V/17.5A 0.14-1.5mm ² /0.14-1.5mm ² L42.5/H41/W4.2 mm		End cover: D-JUK1.5 Fixed bridge: JFB110-4 Insertion bridge : JEB10-4 Marker strips: ZB4
177	Universal Terminal Blocks Color	JUK2.5B	Grey:100101002	800V/32A 0.2-4mm ² /0.2-2.5mm ² L42.5/H41/W6.2 mm		End cover: D-JUK2.5 Fixed bridge: JFB110-6 Insertion bridge : JEB10-6 Marker strips: ZB6
178	Universal Terminal Blocks Color	JUK3N	Grey:100101003	800V/32A 0.2-4mm ² /0.2-2.5mm ² L42.5/H46.2/W5.2 mm		End cover: D-JUK4/10 Fixed bridge: JFB110-5 Insertion bridge : JEB10-5 Marker strips: ZB5
179	Universal Terminal Blocks Color	JUK5N	Grey:100101004	800V/41A 0.2-6mm ² /0.2-4mm ² L42.5/H46.2/W6.2 mm		End cover: D-JUK4/10 Fixed bridge: JFB110-6 Insertion bridge : JEB10-6 Marker strips: ZB6
180	Universal Terminal Blocks Color	JUK6N	Grey:100101005	800V/57A 0.2-10mm ² /0.2-6mm ² L42.5/H46.2/W8.2 mm		End cover: D-JUK4/10 Fixed bridge: JFB110-8 Insertion bridge : JEB10-8 Marker strips: ZB8
181	Universal Terminal Blocks Color	JUK10N	Grey:100101006	800V/76A 0.5-16mm ² /0.5-10mm ² L42.5/H46.2/W10.2 mm		End cover: D-JUK4/10 Fixed bridge: JFB110-10 Insertion bridge : JEB10-10 Marker strips: ZB10
182	Universal Terminal Blocks Color	JUK16	Grey:100101007	800V/101A 2.5-25mm ² /4-16mm ² L42.5/H53/W12.2 mm		End cover: D-JUK16 Fixed bridge: JFB110-12 Insertion bridge : JEB10-12 Marker strips: ZB10
183	Universal Terminal Blocks Color	JUK25	Grey:100101008	800V/101A 2.5-35mm ² / 2.5-25mm ² L42.5/H46.2/W14.2 mm		End cover: D-JUK4/10 Fixed bridge: JFB110-14 Marker strips: ZB10
184	Universal Terminal Blocks Color	JUK35	Grey:100101009	1000V/150A 0.75-50mm ² /0.75-35mm ² L51/H62/W15.2 mm		Fixed bridge: JFB110-15 Insertion bridge : JEB10-15 Marker strips: ZB10
185	Installation Universal Terminal Blocks Color	JUIK16	Grey:100101010	800V/101A 0.25-25mm ² /4-16mm ² L42.5/H46.2/W12.2 mm		End cover: D-JUK4/10 Fixed bridge: JFB110-12 Insertion bridge : JEB10-12 Marker strips: ZB10
186	Installation Universal Terminal Blocks Color	JUIK35	Grey:100101011	800V/125A 0.75-35mm ² /0.75-35mm ² L56/H51/W15.2 mm		Fixed bridge: JFB110-15 Marker strip: ZB10
187	Installation Universal Terminal Blocks (Hex Socket) Color	JUT35	Grey:100101012	1000V/125A 35mm ² L65.3/H60.9/W15.9 mm		Plug-in bridge: FBS2-16 Marker strip: ZB10
188	Ground Terminal Blocks (Hex Socket Screw)	JUT35-PE	100102011	35mm ² L65.3/H60.9/M15.9 mm		Marker strip: ZB10
189	Universal Ground Terminal Blocks	JUSLKG2.5N	100102001	0.2-4mm ² /0.2-2.5mm ² L42.5/H41/W6.2 mm		Marker strip: ZB6
190	Universal Ground Terminal Blocks	JUSLKG3N	100102002	0.2-4mm ² /0.2-2.5mm ² L42.5/H46.2/W5.2 mm		Marker strip: ZB5
191	Universal Ground Terminal Blocks	JUSLKG5N	100102003	0.2-6mm ² /0.2-4mm ² L42.5/H46/W6.2 mm		Marker strip: ZB6


































192	Universal Ground Terminal Blocks	JUSLKG6N	100102004	0.2-10mm ² /0.2-6mm ² L42.5/H46/W8.2 mm		Marker strip: ZB8
193	Universal Ground Terminal Blocks	JUSLKG10N	100102005	0.5-16mm ² /0.5-10mm ² L42.5/H45/W10.2 mm		Marker strip: ZB10
194	Universal Ground Terminal Blocks	JUSLKG16N	100102006	2.5-25mm ² /4-16mm ² L42.5/H53/W12.2 mm		Marker strip: ZB10
195	Universal Ground Terminal Blocks	JUSLKG35	100102007	0.75-50mm ² /0.75-35mm ² L51/H61/W16.2 mm		Marker strip: ZB10
196	Universal Ground Terminal Blocks	JUISLKG16	100102008	2.5-25mm ² /4-16mm ² L42.5/H46.2/W12.2 mm		Marker strip: ZB10
197	Universal Ground Terminal Blocks	JUISLKG35	100102009	0.75-35mm ² /0.75-35mm ² L56/H50.2/W15.2mm		Marker strip: ZB10
198	Universal Ground Terminal Blocks	JUSLKG50	100102010	16-50mm ² /25-50mm ² L71.2/H77/W20 mm		Marker strip: ZB10
199	 Universal Ground Terminal Blocks	JUSLKG95	100102013	25-95mm ² /35-95mm ² L83/H90.5/W25 mm		Marker strip: ZB12
200	Universal High-current Terminal Block Color  	JUKH50	Grey:100101013	1000V/150A 16-50mm ² /25-50mm ² L71.5/H72/W20 mm		Fixed bridge: JEB12-20_3-20 Marker strip: ZB10
201	Universal High-current Terminal Block Color  	JUKH95	Grey:100101014	1000V/232A 25-95mm ² /35-95mm ² L83/H90.5/W25 mm		Insertion bridge: JEB2-25, JEB3-25 Marker strip: ZB10
202	Universal High-current Terminal Block Color  	JUKH150	Grey:100101015	1000V/309A 35-150mm ² /50-150mm ² L101/H112/W31 mm		Insertion bridge: JEB2-31 Marker strip: ZB10
203	Universal High-current Terminal Block Color  	JUKH240	Grey:100101016	1000V/415A 70-240mm ² /70-240mm ² L101/H126/W37 mm		Marker strip: ZB10
204	Twin Conductor Terminal Blocks	JUK-5TWIN	Grey:100101017	500V/32*A 0.2-4mm ² /0.2-4mm ² L50.5/H46.2/W6.2 mm		End cover: D-JUK5-TWIN Fixed bridge: JFB10-6 Insertion bridge: JEB10-6 Marker strips: ZB6
205	Double Terminal Blocks	JUDK4	Grey:100101018	690V/32*A 0.2-4mm ² /0.2-4mm ² L64/H46.2/W6.2 mm		End cover: D-JUDK4 Fixed bridge: JFB10-6 Insertion bridge: JEB10-6 Marker strips: ZB6
206	Double Terminal Blocks	JUDK10	Grey:100101047	690V/57*A 0.2-16mm ² /0.2-10mm ² L64.9/H56.7/W10.2 mm		End cover: D-JUDK10 Fixed bridge: JFB10-10 Insertion bridge: JEB10-10 Marker strips: ZB10
207	Double Level Terminal Blocks Color   	JMBKKB2.5	Grey:100101019	500V/32A 0.2-4mm ² /0.2-2.5mm ² L62.5/H47.5/W5.2 mm		End cover: D-JMBKKB2.5 Fixed bridge: JFBRN10-5N Insertion bridge: JEB10-5 Marker strips: ZB5
208	Double Level Terminal Blocks, with equipotential bonder Color   	JMBKKB2.5-PV	Grey:100101020	500V/32A 0.2-4mm ² /0.2-2.5mm ² L62.5/H47.5/W5.2 mm		End cover: D-JMBKKB2.5 Fixed bridge: JFBRN10-5N Insertion bridge: JEB10-5 Marker strips: ZB5
209	Double Level Terminal Blocks	JUKKB3	Grey:100101021	500V/32A 0.2-4mm ² /0.2-2.5mm ² L68/H62/W5.2 mm		End cover: D-IUKKB3/5 Fixed bridge: JFB10-5 Insertion bridge: JEB10-5 Marker strips: ZB5
210	Double Level Terminal Blocks	JUKKB5	Grey:100101022	500V/32A 0.2-4mm ² /0.2-4mm ² L68/H62/W6.2 mm		End cover: D-IUKKB3/5 Fixed bridge: JFB10-6 Insertion bridge: JEB10-6 Marker strip: ZB6
211	Double Level Terminal Blocks	JUKK3	Grey:100101023	500V/32A 0.2-4mm ² /0.2-2.5mm ² L57/H62/W5.2 mm		End cover: D-IUKK3/5 Fixed bridge: JFB10-5 Insertion bridge: JEB10-5 Marker strip: ZB5
212	 Double Level Terminal Blocks, with equipotential bonder	JUKK3-PV	Grey:100101053	500V/32A 0.2-4mm ² /0.2-2.5mm ² L57/H62/W5.2 mm		End cover: D-IUKK3/5 Fixed bridge: JFBRN10-5N Insertion bridge: JEB10-5 Marker strip: ZB5
213	Double Level Terminal Blocks	JUKK5	Grey:100101024	500V/32A 0.2-4mm ² /0.2-4mm ² L57/H62/W6.2 mm		End cover: D-IUKK3/5 Fixed bridge: JFB10-6 Insertion bridge: JEB10-6 Marker strip: ZB6






































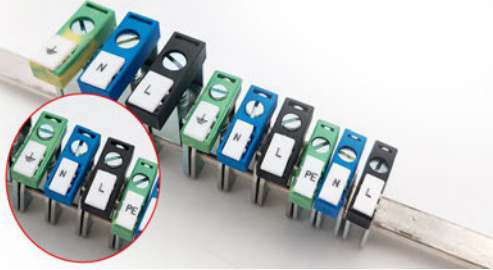

214	Double Level Terminal Blocks, with equipotential bonder	JUKK5-PV	Grey:100101025	500V/32A 0.2-4mm ² /0.2-4mm ² L57/H62/W6.2 mm		End cover: D-JUKK3/5 Fixed bridge: JFB10-6 Insertion bridge: JEB10-6 Marker strip: ZB6
215	new Double Level Ground Terminal Blocks	JUKK5-PE	Grey:100102012	0.2-4mm ² /0.2-4mm ² L57/H62/W6.2 mm		Marker strip: ZB6
216	Three Level Terminal Blocks	JDIKD1.5	Grey:100101026	250V/30A 0.2-4mm ² /0.2-2.5mm ² L73/H54.5/W6.2 mm		Bridge: JEB10-6, JFB10-6 80 seats bridge: EB 80- DIK, can be cut into different seats Marker strip: ZB6
217	Three Level Terminal Blocks, With equipotential bonder	JDIKD1.5-PV	Grey:100101046	250V/30A 0.2-4mm ² /0.2-2.5mm ² L73/H54.5/W6.2 mm		Bridge: JEB10-6, JFB10-6 80 seats bridge: EB 80- DIK, can be cut into different seats Marker strip: ZB6
218	Fuse Terminal Blocks With Disconnect Lever Color 	JUK5-HESI Grey/Black	Grey:100101027	800V/6.3A 0.2-4mm ² /0.2-4mm ² L73.5/H56.5/W8.2 mm		Insertion bridge: JEB10-8 Marker strip: ZB 8 Extra fee for fuse: \$0.024 0.5, 1.2, 3.4, 5, 6, 8, 10A, etc
219	Fuse Terminal Blocks With Disconnect Lever with LED Color 	JUK5-HESILED Grey/Black	24V Grey: 100101028 220V Grey: 100101058	800V/6.3A 0.2-4mm ² /0.2-4mm ² L73.5/H56.5/W8.2 mm		Insertion bridge: JEB10-8 Marker strip: ZB 8 With LED Light: 220V,110V,24V Extra fee for fuse: \$0.024 0.5, 1.2, 3.4, 5, 6, 8, 10A, etc
220	Fuse Terminal Blocks With Screw Cap Color 	JUK10-DREHSI	Grey:100101029	800V/10A 0.5-16mm ² /0.5-16mm ² L62.5/H56.5/W12mm		Fixed bridge: JFB10-12 Marker strip: ZB 8 Extra fee for fuse: \$0.024 /pc 0.5, 1.2, 3.4, 5, 6, 8, 10A, etc
221	Fuse Terminal Blocks With Screw Cap, with LED Color 	JUK10-DREHSILED	24V Grey: 100101030 220V Grey: 100101059	800V/10A 0.5-16mm ² /0.5-16mm ² L62.5/H56.5/W12mm		Fixed bridge: JFB10-12 Marker strip: ZB 8 With LED Light: 220V,24V Extra fee for fuse: \$0.024 0.5, 1.2, 3.4, 5, 6, 8, 10A, etc
222	Knife Disconnect Terminal Blocks	JUK5-MTK-P/P	Grey:100101031	500V/20A 0.2-4mm ² /0.2-4mm ² L51/H46.5/W6.2mm		Insertion bridge: JEB10-6 Marker strip: ZB6
223	Knife Disconnect Terminal Blocks	JUDK4-MTK	Grey:100101048	500V/20A 0.2-6mm ² /0.2-4mm ² L64/H46.2/W6.2 mm		End cover: D-IUDK4 Insertion bridge: JEB10-6 Marker strips: ZB6
224	Simple Test Disconnect Terminal Blocks	JERTK/S	Grey:100101032	400V/57A 0.5-10mm ² /0.5-6mm ² L72.5/H51/W8.2mm		End cover: D-JURTK Fixed bridge: JFB10-URTK/S Insertion bridge: JEB10-8 Marker strip: ZB 8
225	Simple Test Disconnect Terminal Blocks	JURTK/S	Grey:100101033	400V/57A 0.5-10mm ² /0.5-6mm ² L72.5/H51/W8.2mm		End cover: D-JURTK Fixed bridge: JFB10-URTK/S Insertion bridge: JEB10-8 Marker strip: ZB 8
226	new Mini Screw Terminal Block For 15mm DIN Rail	JMBK3/E-Z	Grey:100101049	500V/32A 2.5mm ² L30.2/H26.6/W5.2mm		End cover: D-JMBK3/E Fixed bridge: JFB10-5 Insertion bridge: JEB10-5 Marker strip: ZB5
227	End cover	D-JMBK/E	Grey:100201017	L30.2/H26.1/W1mm		Match with: JMBK3/E-Z
228	Marker Carrier	JB1	Grey:100221002	L45/H47/W9.5mm		For DIN Rail
229	Marker Carrier	JB2(JUBE/D)	Grey:100221003	L45/H45/W20mm		For DIN Rail
230	UK Separating Plates	TS-KK3	Grey:100201014	L16/H14/W1mm		For JUK2.5B
231	TS-K	TS-K	Grey:100201015	L22/H22.5/W1mm		For most types UK models
232	Partition Plate	ATP-JUK	Grey:100201013	L57.5/H47/W1.5mm		For UK series Only
233	End Cover	D-JUK1.5	Grey:100201001	L42.5/H31/W1.5mm		Match with terminal block: JUK1.5N
234	End Cover	D-JUK2.5	Grey:100201002	L42.5/H31/W1.5mm		Match with terminal block: JUK2.5B
235	End Cover	D-JUK4/10	Grey:100201003	L42.5/H36.2/W1.8mm		Match with terminal block: JUK3N, JUK5N, JUK6N JUK10N, JUK16

236	End Cover	D-JUK16	Grey:100201004	L42.5/H43/W1.5mm		Match with terminal block: JUK16
237	End Cover	D-JUK5-TWIN	Grey:100201005	L50.5/H34.5/W1.5		Match with terminal block: JUK-5TWIN
238	End Cover	D-JUDK4	Grey:100201006	L64/H36.2/W1.7		Match with terminal block: JUDK4
239	End Cover	D-JUDK10	Grey:100201016	L63.5/H35.9/W1.5		Match with terminal block: JUDK10
240	End Cover	D-JMBKKB2.5	Grey:100201007	L62.5/H40/W2.6		Match with terminal block: JMBKKB2.5
241	End Cover	D-JUKKB3/5	Grey:100201008	L68/H52.2/W2.6 mm		Match with terminal block: JUKKB3, JUKKB5
242	End Cover	DP-JUKKB3/5	Grey:100201009	L68/H25/W2.5 mm		Match with terminal block: JUKKB3, JUKKB5
243	End Cover	D-JUKK3/5	Grey:100201010	L57/H52.2/W5 mm		Match with terminal block: JUKK3, JUKK5
244	End Cover	DG-JUKK3/5	Grey:100201018	L57/H52.2/W5 mm		Match with terminal block: JUKK3, JUKK5
245	End Cover	DP-JUKK3/5	Grey:100201011	L57/H25/W2.5 mm		Match with terminal block: JUKK3, JUKK5
246	End Cover	D-JURTK/S	Grey:100201012	L72.5/H42/W1.7 mm		Match with terminal block: JURTK/S
247	Fixed Bridge	JFBRNI10-5N	100211001	L41.8/H10/W4.7 mm		For JMBKKB2.5 Can cut into different seats
248	Fixed Bridge	JFBI10-4	100211002	L41.8/H10/W4.7 mm		For JUK1.5N Can cut into different seats
249	Fixed Bridge, 10 seats	JFBI10-5	100211003	L51.2/H15.8/W5 mm		For JUK3N,
250	Fixed Bridge, 2 seats	JFBI2-5	100211004	L10.3/H15.8/W5 mm		
251	Fixed Bridge, 3 seats	JFBI3-5	100211005	L15.4/H15.8/W5 mm		
252	Fixed Bridge, 4 seats	JFBI4-5	100211006	L20.4/H15.8/W5 mm		
253	Fixed Bridge, 10 seats	JFBI10-6	100211012	L59.8/H9.5/W5.9 mm		For JUK2.5B, JUK5N JUDK4
254	Fixed Bridge, 2 seats	JFBI2-6	100211013	L10.6/H9.5/W5.9 mm		
255	Fixed Bridge, 3 seats	JFBI3-6	100211014	L16.9/H9.5/W5.9 mm		
256	Fixed Bridge, 4 seats	JFBI4-6	100211015	L23/H9.5/W5.9 mm		
257	Fixed Bridge, 10 seats	JFBI10-8	100211021	L80.7/H7.7/W6.7 mm		
258	Fixed Bridge, 2 seats	JFBI2-8	100211022	L14/H7.7/W6.7 mm		
259	Fixed Bridge, 3 seats	JFBI3-8	100211023	L22.2/H7.7/W6.7 mm		For JUK6N,
260	Fixed Bridge, 4 seats	JFBI4-8	100211024	L30.5/H7.7/W6.7 mm		
261	Fixed Bridge	JFBI10-10	100211030	L99.5/H7.8/W7.9 mm		For JUK10N, Can cut into different seats
262	Fixed Bridge	JFBI10-12	100211039	L116.5/H8.0/W7.9 mm		For JUK16, JUK16 Can cut into different seats
263	Fixed Bridge	JFBI10-14	100211044			For JUK25 Can cut into different seats
264	Fixed Bridge	JFBI10-15	100211049	L148/H12/W10.9 mm		For JUK35, JUK35 Can cut into different seats
265		JFBI2-15	100211050	L26.3/H12/W10.9 mm		
266		JFBI3-15	100211051	L41.5/H12/W10.9 mm		
267	Fixed Bridge	JFBI2-20	100211054	L36.6/H13.3/W13.8 mm		For JUKH50
268	Fixed Bridge	JFBI3-20	100211055	L57.4/H13/W14 mm		For JUKH50
269	Fixed Bridge	JFBI10-URTK/S	100211056	L79.3/H10.1/W3.5 mm		For JURTK/S Can cut into different seats









270	Insertion Bridge	JEB10-5	100211065	L51/H20.8 mm		For JUK3N,	
271		JEB2-5	100211066	L10/H20.8 mm			
272		JEB3-5	100211067	L12.6/H20.8 mm			
273		JEB4-5	100211068	L17.8/H20.8 mm			
274		JEB10-6	100211070	L61/H22 mm			
275	Insertion Bridge	JEB2-6	100211071	L10.3/H22 mm		For JUK2.5B, JUK5N,	
276		JEB3-6	100211072	L16.7/H22 mm			
277		JEB4-6	100211073	L23/H22 mm			
278		JEB10-8	100211075	L80.1/H24.9 mm			
279	Insertion Bridge	JEB2-8	100211076	L13.6/H24.9 mm		For JUK6N,	
280		JEB3-8	100211077	L21.2/H24.9 mm			
281		JEB10-10	100211078	L98.7/H28.1 mm			
282	Insertion Bridge	JEB3-10	100211080	L26.8/H28.1 mm		For JUK10N,	
283		JEB2-10	100211079	L12.8/H28.1 mm			
284	Insertion Bridge	JEB10-12	100211103			For JUK16, JUIK16	
285	Insertion Bridge	JEB10-15	100211104			For JUK35, JUIK35	
286	Insertion Bridge	JEB2-25	100211105			For JUKH95	
287		JEB3-25	100211106				
288	Insertion Bridge	JEB2-31	100211107			For JUKH150	
289	Insertion Bridge for JDIKD 1.5 80 Seats, can cut into different seats Color 	JEB80-DIK	100211081	H10.9mm x 3.6		\$0.113 for 1 seat, apply from 2 seats ~ 80 seats	
290	Blank Marker Strips Unit price for 10 seats/strip (Suitable for JPT, JUK, JST Series)	ZB3.5	100222001			For JPT series, 1.5mm ²	
291		ZBFM3.5, ZBFM5, ZBFM6	100222019 100222022 100222025			For 1.5, 2.5, 4mm ² JST/JPT side	
292		ZB4	100222004	Lettering field : 4.5x8.5mm		For thickness 4.2mm	
293		ZB5	100222007	Lettering field : 4.7*10.5mm		For thickness 5.2mm	
294		ZB6	100222010	Lettering field : 6*10.5mm		For thickness 6.2mm	
295		ZB8	100222013	Lettering field : 7.2*10.4mm		For thickness 8.2mm	
296		ZB10	100222016	Lettering field : 9.3*10.7mm		For thickness 10.2mm	
297		ZB12	100222034				
298	Marker Strips with numbering: 1-10,11-20,...,91-100 Unit price for 10 seats/strip (Suitable for JPT, JUK, JST Series)	ZB3.5	100222002			For JPT series, 1.5mm ²	
299		ZBFM3.5, ZBFM5, ZBFM6	100222020 100222023 100222026			For 1.5, 2.5, 4mm ² JST/JPT side	
300		ZB4	100222005	Lettering field : 4.5x8.5mm		For thickness 4.2mm	
301		ZB5	100222008	Lettering field : 4.7*10.5mm		For thickness 5.2mm	
302		ZB6	100222011	Lettering field : 6*10.5mm		For thickness 6.2mm	
303		ZB8	100222014	Lettering field : 7.2*10.4mm		For thickness 8.2mm	
304		ZB10	100222017	Lettering field : 9.3*10.7mm		For thickness 10.2mm	
305		ZB12	100222035				
306	Marker Strips with customized numbering Unit price for 10 seats/strip (Suitable for JPT, JUK, JST Series)	ZB3.5	100222003			With customized wording	
307		ZBFM3.5, ZBFM5, ZBFM6	100222021 100222024 100222027				For 1.5, 2.5, 4mm ² JST/JPT side
308		ZB4, ZB5, ZB6, ZB8, ZB10	100222006 100222009 100222012 100222015 100222018				
309		ZB12	100222036				
 <p>Side Entry & Mini Spring Terminal Block 1.Side entry: Gray, Yellow/Green. Mini type: Gray, Blue, Orange, Yellow/Green. 2. Other color and Logo can be customized.</p>							
310	Spring-cage Terminal Blocks	280-101	Grey:100109014	800V/24A 0.08-2.5mm ² L42/H35.5/W5 mm		End cover: 280-301 Adjacent bridge: 280-402 Alternate bridge: 280-409 Marker strip: WSB	
311	Spring-cage Ground Terminal Blocks	280-107	100110010	800V/24A 0.08-2.5mm ² L42/H35/W5 mm		End cover: 280-301 Marker strip: WSB	
312	Spring-cage Terminal Blocks	281-101	Grey:100109015	800V/32A 0.08-4mm ² L42/H37.5/W6 mm		End cover: 281-301 Adjacent bridge: 281-402 Alternate bridge: 281-409 Marker strip: WSB	
313	Spring-cage Ground Terminal Blocks	281-107	100110011	800V/32A 0.08-4mm ² L45/H40/W6 mm		End cover: 281-301 Marker strip: WSB	
314	Spring-cage Terminal Blocks	282-101	Grey:100109016	800V/41A 0.2-6mm ² L46.2/H42/W8 mm		End cover: 282-301 Adjacent bridge: 282-402 Marker strip: WSB	

315	Mini Terminal Blocks	260-301	Grey:100109018	400V/18A 0.08-1.5mm ² L25.5/H17.5/W5 mm		End cover: 260-361 Bridge: 260-402
316	Mini Terminal Blocks	261-301	Grey:100109019	500V/24A 0.08-2.5mm ² L28.5/H18.3/W6 mm		End cover: 261-361 Bridge: 261-402 Another type 261-301-M use with marker strip "DEK 6 "
317	Mini Terminal Blocks (Four conductor)	261-331	Grey:100109020	500V/24A 0.08-2.5mm ² L28.5/H18.3/W12 mm		End cover: 261-361 Bridge: 261-402
318	Mini Terminal Blocks	262-301	Grey:100109021	630V/24A 0.08-4mm ² L33.5/H23.2/W7 mm		End cover: 262-361 Bridge: 262-402
319	End Cover for Mini Terminal Blocks	260-361	100205017	L25.5/H17.5/W2.5 mm		For 260-301
320	End Cover for Mini Terminal Blocks	261-361	100205019	L28.3/H18.2/W2.5mm		For 261-301 261-331
321	End Cover for Mini Terminal Blocks	262-361	100205021	L33.5/H23.2/W7 mm		For 262-301
322	Mini Terminal Blocks	260-301B	100109022	400V/18A 0.08-1.5mm ² L25.2/H22/W5 mm		End cover: 260-361B
323	Mini Terminal Blocks	261-301B	100109023	500V/24A 0.08-2.5mm ² L28.2/H23/W6 mm		End cover: 261-361B Marker strip: DEK 6
324	End Cover for Mini Terminal Blocks	260-361B	100205018	L25.5/H22/W2.5 mm		For 260-301B
325	End Cover for Mini Terminal Blocks	261-361B	100205020	L28.3/H23/W2.5 mm		For 261-301B
326	Mounting Foot With Screw	209-123	100223006	L42/H11 mm		Holder for 260,261,262 series
327	Bridge	W260-402	100214007			For 260-301
328		W261-402	100214008			For 261-301
329		W262-402				For 262-301
330	End Cover	280-301	100205013	L42/H30.5/W2.2 mm		Match with terminal block: 280-101
331	End Cover	281-301	100205014	L40/H32.5/W3 mm		Match with terminal block: 281-101
332	End Cover	282-301	100205015	L46.2/H37/W4 mm		Match with terminal block: 282-101
333	Adjacent Bridge	W279-402				For 279 series
334	Adjacent Bridge	W280-402	100214001	L8.1/H21.8/W5.0 mm		For 280 series
335	Alternate Bridge	W280-409	100214005	L10/H22.2/W8.3 mm		
336	Adjacent Bridge	W281-402	100214002	L6.1/H24.1/W8.4 mm		For 281 series
337	Alternate Bridge	W281-409	100214006	L12/H24.2/W8.2 mm		
338	Adjacent Bridge	W282-402	100214003	L8.0/H25.2/W8.4 mm		For 282 series
339	Adjacent Bridge	W284-402	100214004	L9.5/H25.5/W9.1 mm		For 284 series
340	Blank Marker Strips Unit price for 10 seats	WSB	100222031	Lettering field : 4.6x9 mm		

341	Marker Strips with numbering: 1-10,11-20,....,91-100 Unit price for 10 seats	WSB	100222032	Lettering field : 4.6x9 mm		For all Wago Series
342	Marker Strips with customized numbering, Unit price for 10 seats	WSB	100222033	Lettering field : 4.6x9 mm		
<div style="display: flex; align-items: center; justify-content: center;">  <div style="border: 1px solid #ccc; padding: 5px; margin: 0 20px; text-align: center;"> <p>JSAK Series, Screw Connection Terminal Block</p> <p>1. Standard color: Beige, Blue, Gray(JXB Series).</p> <p>2. Other color and Logo can be customized.</p> <p>3. Products can be made with Diode.</p> </div>  </div>						
343	Universal Terminal Blocks Color 	JSAK2.5EN	Beige:100107001	800V/24A Cross section: 2.5mm ² L41/H41/W6 mm		End cover: AP2.5 Fixed bridge: JSAK2.5Q10 Marker strip: DEK6
344	Universal Terminal Blocks Color 	JSAK4EN	Beige:100107002	800V/32A Cross section: 4mm ² L42/H46.5/W6.5 mm		End cover: AP4/10 Fixed bridge: JSAK4Q10 Marker strip: DEK6
345	Universal Terminal Blocks Color 	JSAK6EN	Beige:100107003	800V/41A Cross section: 6mm ² L42/H46.5/W8 mm		End cover: AP4/10 Fixed bridge: JSAK6Q10 Marker strip: DEK6
346	Universal Terminal Blocks Color 	JSAK10EN	Beige:100107004	800V/57A Cross section: 10mm ² L42/H46.5/W10 mm		End cover: AP4/10 Fixed bridge: JSAK10Q10 Marker strip: DEK6
347	Universal Terminal Blocks Color 	JSAK16EN	Beige:100107005	800V/76A Cross section: 16mm ² L50/H51.5/W12 mm		End cover: AP16 Fixed bridge: JSAK16Q10 Marker strip: DEK6
348	Universal Terminal Blocks Color 	JSAK25EN	Beige:100107006	800V/76A Cross section: 25mm ² L50/H53/W20 mm		End cover: AP16 Marker strip: DEK6
349	Universal Terminal Blocks Color 	JSAK35EN	Beige:100107007	800V/125A Cross section: 35mm ² L58/H62/W18 mm		End cover: AP35 Fixed bridge: JSAK35Q10 Marker strip: DEK6
350	Universal Terminal Blocks Color 	JSAK70/35	Beige:100107008	800V/192A Cross section: 70mm ² L76/H79/W22 mm		End cover: AP 70 Marker strip: DEK6
351	Universal Terminal Blocks Color 	JDK4Q/35	Beige:100107009	500V/32A Cross section: 4mm ² L55.5/H56/W6 mm		End cover: AP-DK40 Fixed bridge: JDK4Q10 Marker strip: DEK6
352	Universal Terminal Blocks Color 	JDK4QV/35	Beige:100107010	500V/32A Cross section: 4mm ² L55.5/H56/W7 mm		End cover: AP-DK40 Fixed bridge: JDK4Q10 Marker strip: DEK6
353	Testing Terminal Blocks Color 	JWTL6/1S	Beige:100107011	400V/41A Cross section: 6mm ² L66/H52/W8 mm		End cover: AP-WTL6/1 Fixed bridge: JSAK6Q10 Marker strip: DEK6
354	Fuse Terminal Blocks Color 	JASK1EN	Beige:100107012	660V/6.3A Cross section: 4mm ² L58.5/H42/W8 mm		End cover: AP-ASK1 Marker strip: DEK6 Extra fee for fuse: \$0.024 0.5, 1, 2,,3,4, 5 ,6, 8,10A, etc
355	Fuse Terminal Blocks With LED Color 	JASK1ENLED	24V Beige:100107013 220V Beige:100107015	660V/6.3A Cross section: 4mm ² L58.5/H42/W8 mm		End cover: AP-ASK1 Marker strip: DEK6 With LED light, 220V, 24V Extra fee for fuse: \$0.024 0.5, 1, 2,,3,4, 5 ,6, 8,10A, etc
356	Universal Ground Terminal Blocks	JEK2.5/35	100108001	Cross section: 2.5mm ² L57/H37/W6 mm		Marker strip: DEK6
357	Universal Ground Terminal Blocks	JEK4/35	100108002	Cross section: 4mm ² L57.5/H41/W6.5 mm		Marker strip: DEK6
358	Universal Ground Terminal Blocks	JEK6/35	100108003	Cross section: 6mm ² L57.5/H41/W8 mm		Marker strip: DEK6
359	Universal Ground Terminal Blocks	JEK10/35	100108004	Cross section: 10mm ² L57.5/H41/W10 mm		Marker strip: DEK6




360	Universal Ground Terminal Blocks	JEK16/35	100108005	Cross section: 16mm ² L58/H47/W12 mm		Marker strip: DEK6
361	Universal Ground Terminal Blocks	JEK35/35	100108006	Cross section: 35mm ² L59/H57/W16.2 mm		Marker strip: DEK6
362	Marker Carrier Color  	JB1 Beige	100221002	L45/41/H47/W9.5 mm		
363	End Cover, SAK Color  	AP2.5	Beige:100204001	L40/H31.5/W1.5 mm		Match with terminal block: JSAK2.5EN
364	End Cover, SAK Color  	AP4/10	Beige:100204002	L40/H37.2/W1.5 mm		Match with terminal block: JSAK4EN JSAK6EN JSAK10EN
365	End Cover, SAK Color  	AP16	Beige:100204003	L50.5/H35/W1.7 mm		Match with terminal block: JSAK16EN
366	End Cover, SAK Color  	AP35	Beige:100204004	L59/H47/W1.9 mm		Match with terminal block: JSAK35EN
367	End Cover, SAK Color  	AP70	Beige:100204005	L71.5/H66.5/W2 mm		Match with terminal block: JSAK 70/35
368	End Cover, SAK Color  	AP-DK4Q	Beige:100204006	L54.7/H40/W1.5 mm		Match with terminal block: JDK4Q/35 JDK4QV/35
369	End Cover, SAK Color  	AP-WTL6/1	Beige:100204007	L66/H36/W1.8 mm		Match with terminal block: JWTL6/1S
370	End Cover, SAK Color  	AP-ASK1	Beige:100204008	L52.4/H24/W1.5 mm		Match with terminal block: JASK1EN
371	Fixed Bridge	JSAK2.5Q10	100213001	L59.2/H15.8 mm		For JSAK2.5EN Can cut into different seats
372	Fixed Bridge	JSAK4Q10	100213007	L64.1/H21.9 mm		For JSAK4EN Can cut into different seats
373	Fixed Bridge	JSAK6Q10	100213012	L77.1/H21.9 mm		For JSAK6EN Can cut into different seats
374	Fixed Bridge	JSAK10Q10	100213015	L92/H21.9 mm		For JSAK10EN Can cut into different seats
375	Fixed Bridge	JSAK16Q10	100213016	L116/H21.9 mm		For JSAK16EN Can cut into different seats
376	Fixed Bridge	JSAK35Q10	100213017	L173/H33.4 mm		For JSAK35EN Can cut into different seats
377	Fixed Bridge	JDK4Q10	100213018	L62/H10.6 mm		For JDK4Q/35, JDK4QV/35 Can cut into different seats
378	Blank Marker Strips Unit price for 10 seats	DEK6	100222028	Lettering field : 5x6 mm		 For all SAK Series
379	Marker Strips with numbering: 1-10,11-20,...,91-100 Unit price for 10 seats	DEK6	100222029	Lettering field : 5x6 mm		
380	Marker Strips with customized numbering, Unit price for 10 seats	DEK6	100222030	Lettering field : 5x6 mm		
 <p>Busbar Connection Terminal Block JAKG4 0.5mm²-4mm² JAKG6 1.5mm²-16mm² JAKG35 2.5mm²-35mm²</p> <p>Marker strips can be placed</p> 						
381	Busbar Connection Terminal Block Blue,Black,Yellow/Green Marker Strip: ZB 5	JAKG4	Black:100701001 Blue:100701001BU Yellow: 100701001PE	300V/41A 0.5-6mm ² /0.5-4mm ² For 3*10mm,6*6mm busbar		ZB5

382	Busbar Connection Terminal Block Blue,Black, Yellow/Green Marker Strip: ZB 6	JAKG16	Black:100701002 Blue:100701002BU Yellow: 100701002PE	300V/76A 1.5-16mm ² /1.5-16mm ² For 3*10mm,6*6mm busbar	 ZB6
383	Busbar Connection Terminal Block Blue,Black, Yellow/Green Marker Strip: ZB 8	JAKG35	Black:100701003 Blue:100701003BU Yellow: 100701003PE	300V/125A 2.5-35mm ² /2.5-35mm ² For 3*10mm,6*6mm busbar	 ZB8
384	Tin Plated Neutral busbar	CU3*10*1000mm	100701004	3*10mm, 1 Meter	 Other size can be customized 
385	One Layer Holder for Busbar, clamp direct type	JAB/SS	100701005	Suitable for 3*10mm, 6*6mm busbar	 
386	One Layer Holder for Busbar, screw tighten type	JAB/SS-2	100701008	Suitable for 3*10mm, 6*6mm busbar	 
387	Double Layers Holder for Busbar	JAB/2SS	100701006	Suitable for 3*10mm, 6*6mm busbar	 
388	Triple Layers Holder for Busbar	JAB/3SS	100701007	Suitable for 3*10mm, 6*6mm busbar	 
 <p>RAILS AND ACCESSORIES DIN Rails, Holders, End Clamps and End covers</p>					
389	15mm wide Color Galvanized Steel DIN Rail	NS15-S-1.0(1M)	100224041	Standard length: 1m Thickness 1.3mm	 Material: Steel Surface: Color Galvanized Can cut into different length
390	Oxide Plated Aluminum DIN Rail	NS35-AL-1.1(1M)	100224035	Standard length: 1m Thickness 1.1mm	 Material: Aluminum Surface: Oxide Plated Can cut into different length
391		NS35-AL-1.3(1M)	100224001	Standard length: 1m Thickness 1.3mm	
392		NS35-AL-1.5(1M)	100224003	Standard length: 1m Thickness 1.5mm	
393	Color Galvanized Steel DIN Rail	NS35-S-0.9(1M)	100224038	Standard length: 1m Thickness 0.9mm	 Material: Steel Surface: Color Galvanized Can cut into different length
394		NS35-S-1.0(1M)	100224005	Standard length: 1m Thickness 1.0mm	
395		NS35-S-1.2(1M)	100224007	Standard length: 1m Thickness 1.2mm	
396	Marker Carrier	JKLM-A	100221001	L46/H38/W9.5mm	 Match with: E/JUK, E/JUK-2
397	End Bracket/Stop	E/JUK	100223001	L43/H36/W9.5mm	 Accessory: JKLM-A Marker Holder
398	End Bracket/Stop	E/JUK-2	100223002	L50/H35/W9.4mm	 Accessory: JKLM-A Marker Holder
399	End Bracket/Stop Color 	JEW35	100223003	L46.5/H31/W8.5 mm	 Marker strip: DEK6 For 35mm Wide DIN Rail
400	Clamp Direct End Bracket/Stop	WKF15	100223010	L24.5/H22.8/W5.2 mm	 For 15mm Wide DIN Rail
401	Thin Clamp Direct End Bracket/Stop	WKF35/S	100223009	L49.3/H35.5/W5.2 mm	 For 35mm Wide DIN Rail
402	Clamp Direct End Bracket/Stop	WKF35	100223008	L47/H34/W9.5 mm	 For 35mm wide DIN Rail JKLM-A Marker Holder ZB10 Marker Strip
403	End Bracket/Stop	249-117	100223007	L43/H35/W10 mm	 For 35mm Wide DIN Rail

404	Aluminum End Bracket/Stop	E-JAL	100223004	L58/H44/W10mm		
405	Galvanized Steel DIN Rail Clamp	E/FE-2	100223005	Can be fixed on the DIN Rail		
406	End cover for DIN Rail Black	NS35HT-B	100224009	Cut Resistant		For 35mm DIN Rail 
407	End cover for DIN Rail Transparent	NS35HT-T	100224009T	Cut Resistant		
408	Steel DIN Rail Holder	TSTW	100224010	Thickness 2mm		Material: Steel

UKK/WKH Series
Power Distribution Box



409	Unipolar Distribution Box	UKK80A	100401001	690V/80A 1 input 6 output L65/H47/W29.5 mm		Input: 1 x 16mm ² Output: 4 x 6mm ² 2 x 16mm ²
410	Unipolar Distribution Box	UKK125A	100401002	690V/125A 1 input 6 output L74/H47/W29.4 mm		Input: 1 x 16mm ² 1 x 35mm ² Output: 6 x 16mm ²
411	Unipolar Distribution Box	UKK160A	100401003	690V/160A 1 input 6 output L74/H47/W29.4 mm		Input: 1 x 70mm ² 1 x 16mm ² Output: 6 x 16mm ²
412	Unipolar Distribution Box	UKK250A	100401004	690V/250A 1 input 11 output L96/H50/W47.8 mm		Input: 1 x 120mm ² Output: 2 x 35mm ² 5 x 16mm ² 4 x 10mm ²
413	Unipolar Distribution Box	UKK400A	100401005	690V/400A 1 input 11 output L96/H50/W47.8 mm		Input: 1 x 185mm ² Output: 2 x 35mm ² 5 x 16mm ² 4 x 10mm ²
414	Unipolar Distribution Box	UKK500A	100401006	690V/500A 1 input 11 output L96/H50/W47.8 mm		Input: 3 x 15mm ² 8 x 24mm ² Output: 2 x 35mm ² 5 x 16mm ² , 4 x 10mm ²
415	Unipolar Distribution Box	WKH-207	100402001	500V/125A Cross section: 35mm ² L67/H50/W45 mm		Hole Qty: 2 x 7 Brass Bar : 6.5 x 12mm
416	Unipolar Distribution Box	WKH-211	100402002	500V/125A Cross section: 35mm ² L100/H50/W45 mm		Hole Qty: 2 x 11 Brass Bar : 6.5 x 12mm
417	Unipolar Distribution Box	WKH-215	100402003	500V/125A Cross section: 35mm ² L134/H50/W45 mm		Hole Qty: 2 x 15 Brass Bar : 6.5 x 12mm
418	Unipolar Distribution Box	WKH-407	100402004	500V/125A Cross section: 35mm ² L67/H50/W90 mm		Hole Qty: 4 x 7 Brass Bar : 6.5 x 12mm
419	Unipolar Distribution Box	WKH-411	100402005	500V/125A Cross section: 35mm ² L100/H50/W90 mm		Hole Qty: 4 x 11 Brass Bar : 6.5 x 12mm
420	Unipolar Distribution Box	WKH-415	100402006	500V/125A Cross section: 35mm ² L134/H50/W90 mm		Hole Qty: 4 x 15 Brass Bar : 6.5 x 12mm
421	Unipolar Distribution Box	WKH-413	100402007	500V/160A Cross section: 35mm ² L180/H73/W138 mm		Hole Qty: 4 x 13 Brass Bar : 8 x 17mm
422	Unipolar Distribution Box	WKH-200A	100402008	500V/200A Cross section: 75mm ² L280/H115/W190 mm		Hole Qty: 4 x 11 Brass Bar : 4 x 15mm

423	Unipolar Distribution Box	WKH-250A	100402009	500V/250A Cross section: 100mm ² L280/H115/W190 mm		Hole Qty: 4 x 11 Brass Bar : 5 x 20mm
424	Unipolar Distribution Box	WKH-400A	100402010	500V/400A Cross section: 185mm ² L280/H115/W180 mm		Hole Qty: 4 x 10 Brass Bar :6 x 25mm
<p>Tools WKC series WKT series</p>  						
425	VE Crimp Tool	WKC8(10-4)	104101001	Square shape after crimped For cross section: 0.25-10mm ²		
426	VE Crimp Tool	WKC8(6-6)	104101002	Hexagon shape after crimped For cross section: 0.25-6mm ²		
427	Cutting plier Tool Cut FBS accessories	WKT3.5-6Q	104102001	Suitable for: FBS 10-3.5 FBS 10-4 FBS 10-5 FBS 10-6		
428	Cutting plier Tool Cut FBS accessories	WKT6-10Q	104102002	Suitable for: FBS 10-6 FBS 10-8 FBS 10-10		
429	 Automatic wire stripper	HS-700B	104101003	Suitable for: 0.5-6mm ²		
430	2.5*75 Slot Screw driver	WKT2.5*75	104103001			
431	5*100 Slot Screw driver	WKT5*100	104103002			
432	DIN Rail Cutter	WKT-NS02	100224011	Suitable for DIN Rail: NS 35-AL-1.5 NS 35-S-1.0		Other specification can be customized.
433	Automatic wire stripping and pressing machine	WKT2.5VE	104101101	Suitable for Solid wire 0.5-4mm ² Ferrules, soft wire 0.5-2.5mm ²		 



WHE Series Heavy Duty Connector
6-8 Side entry/Top entry
 -Water-proof,anti-rust and anti-corrosion
 -Sliver-plated contacts



No.	PART NO.	Order No.	Entry Side	Number of contact	Description	Water-proof connector	Panel Installation Dimension (mm)	Picture
-----	----------	-----------	------------	-------------------	-------------	-----------------------	-----------------------------------	---------

WHA Heavy-duty connector

Voltage/Current: 4, 5, 6 contacts (230V/10A), 8 contacts (230V/16A)

Surface: Sliver-plated

Contact resistance: $\leq 1m\ \Omega$

Cross section: 1.0-2.5mm² (AWG 18-14) For 4/5 contacts

0.14-4.0mm² (AWG 26-12) For 6/8 contacts



1 set including above accessories;
6/8 pins type will provide separated ferrule pins.

1	WHA04C	100506001	Side entry	4	3+1ground	PG11		
2	WHA05C	100506002	Side entry	5	4+1ground	M20		
3	WHA06C	100506003	Side entry	6	5+1ground	M20		
4	WHA08C	100506004	Side entry	8	7+1ground	M20		
5	WHA04D	100506005	Top entry	4	3+1ground	PG11		
6	WHA05D	100506006	Top entry	5	4+1ground	M20		
7	WHA06D	100506007	Top entry	6	5+1ground	M20		
8	WHA08D	100506008	Top entry	8	7+1ground	M20		
9	WHA04W	100506009	Horizontal	4	3+1ground	PG11		
10	WHA05W	100506010	Horizontal	5	4+1ground	M20		
11	WHA06W	100506011	Horizontal	6	5+1ground	M20		
12	WHA08W	100506012	Horizontal	8	7+1ground	M20		
13	WHA04WD	100506013	Horizontal But	4	3+1ground	PG11		
14	WHA05WD	100506014	Horizontal But	5	4+1ground	PG11		
15	WHA06WD	100506015	Horizontal But	6	5+1ground	PG11		
16	WHA08WD	100506016	Horizontal But	8	7+1ground	PG11		
17	WHA04DJ	100506017	Docking	4	3+1ground	PG11	No Panel Installation	
18	WHA05DJ	100506018	Docking	5	4+1ground	M20		
19	WHA06DJ	100506019	Docking	6	5+1ground	M20		
20	WHA08DJ	100506020	Docking	8	7+1ground	M20		

WHA Heavy Duty Male/Female Inserts

13	WHA04X	100506021	Male+Female	4	3+1ground	Suitable for WHA04D, WHA04C, WHA04W, WHA04WD, WHA04DJ	
14	WHA05X	100506022	Male+Female	5	4+1ground	Suitable for WHA05D, WHA05C, WHA05W, WHA05WD, WHA05DJ	
15	WHA06X	100506023	Male+Female	6	5+1ground	Suitable for WHA06D, WHA06C, WHA06W, WHA06WD, WHA06DJ	
16	WHA08X	100506024	Male+Female	8	7+1ground	Suitable for WHA08D, WHA08C, WHA08W, WHA08WD, WHA08DJ	

No.	PART NO.	Order No.	Entry Side	Number of contact	Water-proof connector	A (mm)	B (mm)	C (mm)	E (mm)	F (mm)	G (mm)	d (mm)	Picture
-----	----------	-----------	------------	-------------------	-----------------------	--------	--------	--------	--------	--------	--------	--------	---------

WHE Heavy-duty connector

Voltage/Current: 500V/16A


Surface: Silver-plated

Contact resistance: $\leq 1m\ \Omega$

Cross section: 1.0-2.5mm² (AWG 18-14)

Tightening torque: 0.5Nm

Stripping length: 7mm

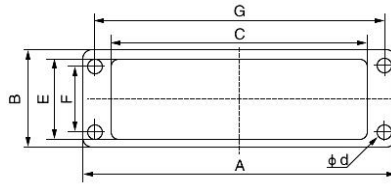

Panel Installation size:



With male/female insert

1	WHE06C	100505001	Side entry	6	PG13.5	80.0	43.0	52.2	35.0	32.0	70.0	4.3	
2	WHE06D	100505002	Top entry	6	PG13.5	80.0	43.0	52.2	35.0	32.0	70.0	4.3	
3	WHE10C	100505003	Side entry	10	PG16	93.0	43.0	65.2	35.0	32.0	83.0	4.3	
4	WHE10D	100505004	Top entry	10	PG16	93.0	43.0	65.2	35.0	32.0	83.0	4.3	
5	WHE16C	100505005	Side entry	16	PG21	113.0	43.0	85.5	35.0	32.0	103.0	4.3	
6	WHE16D	100505006	Top entry	16	PG21	113.0	43.0	85.5	35.0	32.0	103.0	4.3	
7	WHE24C	100505007	Side entry	24	PG21	140.0	43.0	112.2	35.0	32.0	130.0	4.3	
8	WHE24D	100505008	Top entry	24	PG21	140.0	43.0	112.2	35.0	32.0	130.0	4.3	
9	WHE32C	100505009	Side entry	32	PG29	113.0	80.5	86.0	73.0	60.0	103.0	4.5	
10	WHE32D	100505010	Top entry	32	PG29	113.0	80.5	86.0	73.0	60.0	103.0	4.5	
11	WHE48C	100505011	Side entry	48	PG29	140.0	80.5	113.0	73.0	60.0	130.0	4.5	
12	WHE48D	100505012	Top entry	48	PG29	140.0	80.5	113.0	73.0	60.0	130.0	4.5	

WHE Heavy Duty Male/Female Inserts

13	WHE06X	100505013	Male+Female	6	Insertion for WHE06C/WHE06D							
14	WHE10X	100505014	Male+Female	10	Insertion for WHE10C/WHE10D							
15	WHE16X	100505015	Male+Female	16	Insertion for WHE16C/WHE16D							
16	WHE24X	100505016	Male+Female	24	Insertion for WHE24C/WHE24D							
17	WHE32X	100505017	Male+Female	32	Insertion for WHE32C/WHE32D							
18	WHE48X	100505018	Male+Female	48	Insertion for WHE48C/WHE48D							



VE/TE Series Cold Terminal

The following colors are available



Other styles are available



No.	PART NO.	Order No.	Cross Section (mm ²)	L (mm)	F (mm)	W (mm)	D (mm)	C (mm)	package
-----	----------	-----------	----------------------------------	--------	--------	--------	--------	--------	---------

VE series cold pressed terminal block

Color as follows for your choice:




VE Red Copper+Nylon

1	VE0308-A	100301001	0.3mm ²	12.4	8.0	1.9	1.1	0.8	1000 pcs per bag
2	VE0508-A	100301002	0.5mm ²	14.0	8.0	2.5	1.3	1.0	1000 pcs per bag
3	VE0510-A	100301008	0.5mm ²	16.0	10.0	2.5	1.3	1.0	1000 pcs per bag
4	VE0512-A	100301013	0.5mm ²	18.0	12.0	2.6	1.3	1.0	1000 pcs per bag
5	VE7508-A	100301003	0.75mm ²	14.6	8.0	2.8	1.5	1.2	1000 pcs per bag
6	VE7510-A	100301009	0.75mm ²	16.4	10.0	2.8	1.5	1.2	1000 pcs per bag
7	VE7512-A	100301014	0.75mm ²	18.4	12.0	2.8	1.5	1.2	1000 pcs per bag
8	VE1008-A	100301004	1.0mm ²	14.3	8.0	2.8	1.7	1.4	1000 pcs per bag
9	VE1010-A	100301010	1.0mm ²	16.3	10.0	3.0	1.7	1.4	1000 pcs per bag
10	VE1012-A	100301015	1.0mm ²	19.3	12.0	3.0	1.7	1.4	1000 pcs per bag
11	VE1508-A	100301005	1.5mm ²	14.6	8.0	3.5	2.0	1.7	1000 pcs per bag
12	VE1510-A	100301011	1.5mm ²	16.4	10.0	3.5	2.0	1.7	1000 pcs per bag
13	VE1512-A	100301016	1.5mm ²	18.4	12.0	3.5	2.0	1.7	1000 pcs per bag
14	VE2508-A	100301006	2.5mm ²	15.2	8.0	4.0	2.6	2.3	1000 pcs per bag
15	VE2510-A	100301012	2.5mm ²	17.2	10.0	4.0	2.6	2.3	1000 pcs per bag
16	VE2512-A	100301017	2.5mm ²	19.2	12.0	4.0	2.6	2.3	1000 pcs per bag
17	VE4009-A	100301018	4.0mm ²	16.5	9.0	4.4	3.2	2.8	1000 pcs per bag
18	VE4012-A	100301019	4.0mm ²	19.5	12.0	4.4	3.2	2.8	1000 pcs per bag
19	VE6010-A	100301020	6.0mm ²	18.0	10.0	6.3	3.9	3.5	1000 pcs per bag
20	VE6012-A	100301021	6.0mm ²	20	12	6.3	3.9	6.5	1000 pcs per bag
21	VE10-12-A	100301031	10mm ²	22	12	7.5	4.9	4.5	1000 pcs per bag
22	VE10-18-A	100301032	10mm ²	26	18	7.5	4.9	4.5	1000 pcs per bag
23	VE16-12-A	100301033	16mm ²	22	12	8.7	6	5.8	500 pcs per bag
24	VE16-18-A	100301034	16mm ²	28	18	8.7	6	5.8	500 pcs per bag


25	VE25-12-A	100301043	25mm ²	24	12	11	7.9	7.5	200 pcs per bag
26	VE25-16-A	100301035	25mm ²	28	16	11	7.9	7.5	200 pcs per bag
27	VE35-25-A	100301045	35mm ²	25	30	12.5	8.7	8.3	200 pcs per bag
28	VE50-20-A	100301044	50mm ²	20	36	16	10.9	10.3	100 pcs per bag
VE Brass+Nylon									
1	VE0508-B	100302002	0.5mm ²	14.0	8.0	2.5	1.3	1.0	1000 pcs per bag
2	VE0510-B	100302008	0.5mm ²	16.0	10.0	2.5	1.3	1.0	1000 pcs per bag
3	VE0512-B	100302013	0.5mm ²	18.0	12.0	2.6	1.3	1.0	1000 pcs per bag
4	VE7508-B	100302003	0.75mm ²	14.6	8.0	2.8	1.5	1.2	1000 pcs per bag
5	VE7510-B	100302009	0.75mm ²	16.4	10.0	2.8	1.5	1.2	1000 pcs per bag
6	VE7512-B	100301014	0.75mm ²	18.4	12.0	2.8	1.5	1.2	1000 pcs per bag
7	VE1008-B	100302004	1.0mm ²	14.3	8.0	2.8	1.7	1.4	1000 pcs per bag
8	VE1010-B	100302010	1.0mm ²	16.3	10.0	3.0	1.7	1.4	1000 pcs per bag
9	VE1012-B	100302015	1.0mm ²	19.3	12.0	3.0	1.7	1.4	1000 pcs per bag
10	VE1508-B	100302005	1.5mm ²	14.6	8.0	3.5	2.0	1.7	1000 pcs per bag
11	VE1510-B	100302011	1.5mm ²	16.4	10.0	3.5	2.0	1.7	1000 pcs per bag
12	VE1512-B	100302016	1.5mm ²	18.4	12.0	3.5	2.0	1.7	1000 pcs per bag
13	VE2508-B	100302006	2.5mm ²	15.2	8.0	4.0	2.6	2.3	1000 pcs per bag
14	VE2510-B	100302012	2.5mm ²	17.2	10.0	4.0	2.6	2.3	1000 pcs per bag
15	VE2512-B	100302017	2.5mm ²	19.2	12.0	4.0	2.6	2.3	1000 pcs per bag
16	VE4009-B	100302018	4.0mm ²	16.5	9.0	4.4	3.2	2.8	1000 pcs per bag
17	VE4012-B	100302019	4.0mm ²	19.5	12.0	4.4	3.2	2.8	1000 pcs per bag
18	VE6010-B	100302020	6.0mm ²	18.0	10.0	6.3	3.9	3.5	1000 pcs per bag
19	VE6012-B	100302021	6.0mm ²	20	12	6.3	3.9	6.5	1000 pcs per bag
20	VE10-12-B	100302031	10mm ²	22	12	7.5	4.9	4.5	1000 pcs per bag
21	VE10-18-B	100302032	10mm ²	26	18	7.5	4.9	4.5	1000 pcs per bag
22	VE16-12-B	100302033	16mm ²	22	12	8.7	6	5.8	500 pcs per bag
23	VE16-18-B	100302034	16mm ²	28	18	8.7	6	5.8	500 pcs per bag
24	VE25-12-B	100302039	25mm ²	24	12	11	7.9	7.5	200 pcs per bag
25	VE25-16-B	100302035	25mm ²	28	16	11	7.9	7.5	200 pcs per bag
26	VE35-16-B	100302037	35mm ²	16	30	12.5	8.7	8.3	200 pcs per bag
27	VE50-20-B	100302041	50mm ²	20	36	16	10.9	10.3	100 pcs per bag

TE series Double Ferrule terminal block

Color as follows for your choice:



Red Copper+Nylon



No.	PART NO.	Order No.	Cross Section (mm ²)	L (mm)	F (mm)	W (mm)	B (mm)	D (mm)	C (mm)	package
1	TE0508-A	100303001	2*0.5	14.5	8.0	5.0	6.5	1.8	1.5	1000 pcs per bag
2	TE0510-A	100303006	2*0.5	16.5	10.0	5.0	6.5	1.8	1.5	1000 pcs per bag
3	TE0512-A	100303011	2*0.5	18.5	12.0	5.0	6.5	1.8	1.5	1000 pcs per bag
4	TE7508-A	100303002	2*0.75	14.7	8.0	5.5	6.7	2.1	1.8	1000 pcs per bag
5	TE7510-A	100303007	2*0.75	16.7	10.0	5.5	6.7	2.1	1.8	1000 pcs per bag
6	TE7512-A	100303012	2*0.75	18.7	12.0	5.5	6.7	2.1	1.8	1000 pcs per bag
7	TE1008-A	100303003	2*1.0	15.1	8.0	5.5	7.1	2.3	2.0	1000 pcs per bag
8	TE1010-A	100303008	2*1.0	17.1	10.0	5.5	7.1	2.3	2.0	1000 pcs per bag
9	TE1012-A	100303013	2*1.0	19.1	12.0	5.5	7.1	2.3	2.0	1000 pcs per bag
10	TE1508-A	100303004	2*1.5	15.5	8.0	6.4	7.2	2.6	2.3	1000 pcs per bag
11	TE1510-A	100303009	2*1.5	17.5	10.0	6.4	7.5	2.6	2.3	1000 pcs per bag
12	TE1512-A	100303014	2*1.5	19.5	12.0	6.4	7.5	2.6	2.3	1000 pcs per bag
13	TE2508-A	100303005	2*2.5	16.5	8.0	8.0	8.5	3.3	2.9	1000 pcs per bag
14	TE2510-A	100303010	2*2.5	18.5	10.0	8.0	8.5	3.3	2.9	1000 pcs per bag
15	TE2512-A	100303015	2*2.5	20.5	12.0	8.0	8.5	3.3	2.9	1000 pcs per bag
16	TE4012-A	100303016	2*4.0	23.1	12.0	8.8	11.1	4.2	3.8	1000 pcs per bag
17	TE6014-A	100303020	2*6.0	26.1	14.0	9.5	12.1	5.3	4.9	1000 pcs per bag
18	TE10-14-A	100303019	2*10	26.1	14.0	12.6	12.6	6.9	6.5	500 pcs per bag
19	TE16-14-A	100303021	2*16	31.3	14.0	19.0	17.3	8.7	8.3	200 pcs per bag


Available in more types:



Waterproof Connector (Threaded coupling)

IP Grade: Ip68

The contacts can be male or female

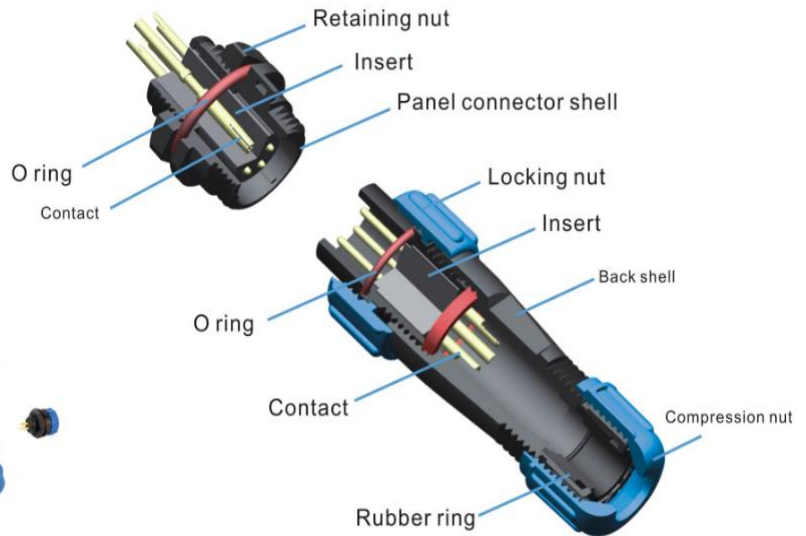

WK11 Series Cable outer diameter range: 4-6.5mm					
Description		Male Plug (Main)	Rear-nut socket (Matching)	Docking socket (Matching)	
Picture					
Contacts					
2pins	Part No.	WK11CP2X	WK11PS2X	WK11RS2X	
	Order No.	100901001	100901003	100901005	
3pins	Part No.	WK11CP3X	WK11PS3X	WK11RS3X	
	Order No.	100901007	100901009	100901011	
4pins	Part No.	WK11CP4X	WK11PS4X	WK11RS4X	
	Order No.	100901013	100901015	100901017	
5pins	Part No.	WK11CP5X	WK11PS5X	WK11RS5X	
	Order No.	100901019	100901021	100901023	
Opposite direction can be customized					
		WK11CS	WK11PP	WK11RP	

WK13 Series Cable outer diameter range: 4-6.5mm					
Description		Male Plug (Main)	Rear-nut socket (Matching)	Docking socket (Matching)	
Picture					
Contacts					
2pins	Part No.	WK13CP2X	WK13PS2X	WK13RS2X	
	Order No.	100902001	100902003	100902005	
3pins	Part No.	WK13CP3X	WK13PS3X	WK13RS3X	
	Order No.	100902007	100901009	100901011	
4pins	Part No.	WK13CP4X	WK13PS4X	WK13RS4X	
	Order No.				

Material and specification









Coupling	Threaded
Shell material	PC, Nylon66, fire resistance: V-0
Insert material	PPS, max temperature 260 °C
Contact material	Brass with gold plating
Termination	Solder: WK11, WK13, WK17, WK21, WK29
	WK11:4-6.5 WK13:4-6.5mm(Standard),5-8mm(Customized) WK17:6-10mm WK21:7-12mm,4.5-7mm(Customized) WK29: 13-16mm
IP rating	IP 68
Temperature range	-40°C~+85°C
Mating cycle	500
Insulation resistance	2000MΩ

Waterproof connector part no. List





















WK 13 CP 07X

① ② ③ ④












- WK= WKDQ brand, Circular Waterproof Connector, Threaded coupling.
- Installation dimension code, 13=13mm
- Series configuration code
 CP=Cable plug CS=Cable socket
 PP=Rear-nut mount plug PS=Rear-nut socket
 RP=Cable docking plug RS=Cable docking socket
 NP=Angled cable plug NS=Angled cable socket
 FP=Flange panel plug FS=Flange panel socket
 SP=Square panel plug SS=Square panel socket
- Number of contact

4pin: 	Order No.	100902013	100902015	100902017
5pins: 	Part No.	WK13CP5X	WK13PS5X	WK13RS5X
	Order No.	100902019	100902021	100902023
6pins: 	Part No.	WK13CP6X	WK13PS6X	WK13RS6X
	Order No.	100902025	100902027	100902029
7pins: 	Part No.	WK13CP7X	WK13PS7X	WK13RS7X
	Order No.	100902031	100902033	100902035
9pins: 	Part No.	WK13CP9X	WK13PS9X	WK13RS9X
	Order No.	100902037	100902039	100902041
Opposite direction can be customized				



























WK17 Series
Cable outer diameter range: 6-10mm

Decsription		Male Plug (Main)	Rear-nut socket (Matching)	Docking socket (Matching)	Angled docking plug (Matching)	Flange rear-nut plug (Matching)	Square rear-nut plug (Matching)
Picture Contacts							
2pin: 	Part No.	WK17CP2X	WK17PS2X	WK17RS2X	WK17NS2X	WK17FS2X	WK17SS2X
	Order No.	100903001	100903003	100903005	100903007	100903009	100903011
3pins: 	Part No.	WK17CP3X	WK17PS3X	WK17RS3X	WK17NS3X	WK17FS3X	WK17SS3X
	Order No.	100903013	100903015	100903017	100903019	100903021	100903023
4pin: 	Part No.	WK17CP4X	WK17PS4X	WK17RS4X	WK17NS4X	WK17FS4X	WK17SS4X
	Order No.	100903025	100903027	100903029	100903031	100903033	100903035
5pins: 	Part No.	WK17CP5X	WK17PS5X	WK17RS5X	WK17NS5X	WK17FS5X	WK17SS5X
	Order No.	100903037	100903039	100903041	100903043	100903045	100903047
6pin: 	Part No.	WK17CP6X	WK17PS6X	WK17RS6X	WK17NS6X	WK17FS6X	WK17SS6X
	Order No.	100903100	100903099	100903098	100903104	100903097	100903107
7pins: 	Part No.	WK17CP7X	WK17PS7X	WK17RS7X	WK17NS7X	WK17FS7X	WK17SS7X
	Order No.	100903049	100903051	100903053	100903055	100903057	100903059
9pins: 	Part No.	WK17CP9X	WK17PS9X	WK17RS9X	WK17NS9X	WK17FS9X	WK17SS9X
	Order No.	100903061	100903063	100903065	100903067	100903069	100903071
10pin: 	Part No.	WK17CP10X	WK17PS10X	WK17RS10X	WK17NS10X	WK17FS10X	WK17SS10X
	Order No.	100903073	100903075	100903077	100903079	100903081	100903083
Opposite direction can be customized							

WK21 Series
Cable outer diameter range: 7-12mm

Description		Male Plug (Main)	Rear-nut socket (Matching)	Docking socket (Matching)	Angled docking plug (Matching)	Flange rear-nut plug (Matching)	Square rear-nut plug (Matching)
Picture Contacts							
2pins	Part No.	WK21CP2X	WK21PS2X	WK21RS2X	WK21NS2X	WK21FS2X	WK21SS2X
	Order No.	100904001	100904003	100904005	100904007	100904009	100904011
3pins	Part No.	WK21CP3X	WK21PS3X	WK21RS3X	WK21NS3X	WK21FS3X	WK21SS3X
	Order No.	100904013	100904015	100904017	100904019	100904021	100904023
4pin	Part No.	WK21CP4X	WK21PS4X	WK21RS4X	WK21NS4X	WK21FS4X	WK21SS4X
	Order No.	100904025	100904027	100904029	100904031	100904033	100904035
5pins	Part No.	WK21CP5X	WK21PS5X	WK21RS5X	WK21NS5X	WK21FS5X	WK21SS5X
	Order No.	100904037	100904039	100904041	100904043	100904045	100904047
5B pins	Part No.	WK21CP5BX	WK21PS5BX	WK21RS5BX	WK21NS5BX	WK21FS5BX	WK21SS5BX
	Order No.	100904049	100904051	100904053	100904055	100904057	100904059
5C pins	Part No.	WK21CP5CX	WK21PS5CX	WK21RS5CX	WK21NS5CX	WK21FS5CX	WK21SS5CX
	Order No.	100904061	100904063	100904065	100904067	100904069	100904071
	Price	\$1.27	\$1.21	\$1.49	\$1.94	\$1.21	\$1.21
7pins	Part No.	WK21CP7X	WK21PS7X	WK21RS7X	WK21NS7X	WK21FS7X	WK21SS7X
	Order No.	100904073	100904075	100904077	100904079	100904081	100904083
9pins	Part No.	WK21CP9X	WK21PS9X	WK21RS9X	WK21NS9X	WK21FS9X	WK21SS9X
	Order No.	100904085	100904087	100904089	100904091	100904093	100904095
12pin	Part No.	WK21CP12X	WK21PS12X	WK21RS12X	WK21NS12X	WK21FS12X	WK21SS12X
	Order No.	100904109	100904111	100904113	100904115	100904117	100904119
Opposite direction can be customized							

WK29 Series
Cable outer diameter range: 13-16mm

Decsription		Male Plug (Main)	Rear-nut socket (Matching)	Docking socket (Matching)	Angled docking plug (Matching)	Flange rear-nut plug (Matching)	Square rear-nut plug (Matching)
Picture Contacts							
2pi 	Part No.	WK29CP2X	WK29PS2X	WK29RS2X	WK29NS2X	WK29FS2X	WK29SS2X
	Order No.	100905001	100905003	100905005	100905007	100905009	100905011
3pi 	Part No.	WK29CP3X	WK29PS3X	WK29RS3X	WK29NS3X	WK29FS3X	WK29SS3X
	Order No.	100905013	100905015	100905017	100905019	100905021	100905023
4pi 	Part No.	WK29CP4X	WK29PS4X	WK29RS4X	WK29NS4X	WK29FS4X	WK29SS4X
	Order No.	100905025	100905027	100905029	100905031	100905033	100905035
7pi 	Part No.	WK21CP7X	WK21PS7X	WK21RS7X	WK21NS7X	WK21FS7X	WK21SS7X
	Order No.	100904073	100904075	100904077	100904079	100904081	100904083
8pin 	Part No.	WK29CP8X	WK29PS8X	WK29RS8X	WK29NS8X	WK29FS8X	WK29SS8X
	Order No.	100905049	100905051	100905053	100905055	100905057	100905059
9pi 	Part No.	WK29CP9X	WK29PS9X	WK29RS9X	WK29NS9X	WK29FS9X	WK29SS9X
	Order No.	100905061	100905063	100905065	100905067	100905069	100905071
10 pin 	Part No.	WK29CP10X	WK29PS10X	WK29RS10X	WK29NS10X	WK29FS10X	WK29SS10X
	Order No.	100905073	100905075	100905077	100905079	100905081	100905083
10B pin 	Part No.	WK29CP10BX	WK29PS10BX	WK29RS10BX	WK29NS10BX	WK29FS10BX	WK29SS10BX
	Order No.	100905085	100905087	100905089	100905091	100905093	100905095
12pi 	Part No.	WK29CP12X	WK29PS12X	WK29RS12X	WK29NS12X	WK29FS12X	WK29SS12X
	Order No.	100905097	100905099	100905101	100905103	100905105	100905107
16pi 	Part No.	WK29CP16X	WK29PS16X	WK29RS16X	WK29NS16X	WK29FS16X	WK29SS16X
	Order No.	100905109	100905111	100905113	100905115	100905117	100905119
17pi 	Part No.	WK29CP17X	WK29PS17X	WK29RS17X	WK29NS17X	WK29FS17X	WK29SS17X
	Order No.	100905121	100905123	100905125	100905127	100905129	100905131
20pi 	Part No.	WK29CP20X	WK29PS20X	WK29RS20X	WK29NS20X	WK29FS20X	WK29SS20X
	Order No.	100905133	100905135	100905137	100905139	100905141	100905143
24pi 	Part No.	WK29CP24X	WK29PS24X	WK29RS24X	WK29NS24X	WK29FS24X	WK29SS24X
	Order No.	100905145	100905147	100905149	100905151	100905153	100905155
26pi 	Part No.	WK29CP26X	WK29PS26X	WK29RS26X	WK29NS26X	WK29FS26X	WK29SS26X
	Order No.	100905157	100905159	100905161	100905163	100905165	100905167
Opposite direction can be customized							




No.	ITEM	PART NO.	Order No.	DETAIL	PIC.	Remark
1	Push-in Connector	773-102	100501001	400V/24A Cross section:2.5mm ² L19.5/W13.1/H9.2 mm		Available in PC material
2	Push-in Connector	773-104	100501002	400V/24A Cross section:2.5mm ² L19.5/W13/H13.1 mm		Available in PC material
3	Push-in Connector	773-106	100501003	400V/24A Cross section:2.5mm ² L19.5/W18.8/H13.1 mm		Available in PC material
4	Push-in Connector	773-108	100501004	400V/24A Cross section:2.5mm ² L19.5/W24.2/H13.1 mm		Available in PC material
5	Push-in Connector	773-173	100501005	400V/24A Cross section:6mm ² L25.6/W20.1/H14.2 mm		Available in PC material
6	Push-in Connector	773-174	100501006	400V/32A Cross section:6mm ² L33.5/W20.1/H10.2 mm		
7	Push-in Connector	773-602	100501007	400V/32A Cross section:4mm ² L19.5/W13.1/H9.2 mm		
8	Push-in Connector	773-604	100501008	400V/32A Cross section:4mm ² L19.5/W13/H13.1 mm		
9	Push-in Connector	773-606	100501009	400V/32A Cross section:4mm ² L19.5/W18.8/H13.1 mm		
10	Push-in Connector	2273-202	100501010	450V24A Cross section:2.5mm ² L16.5/W10/H5.8mm		
11	Push-in Connector	2273-203	100501011	450V24A Cross section:2.5mm ² L16.5/W14/H5.8mm		
12	Push-in Connector	2273-204	100501012	450V24A Cross section:2.5mm ² L16.5/W18/H5.8mm		
13	Push-in Connector	2273-205	100501013	450V24A Cross section:2.5mm ² L16.5/W22/H5.8mm		
14	Push-in Connector	2273-206	100501014	450V24A Cross section:2.5mm ² L16.7/W14/H5.8mm		
15	Push-in Connector	2273-208	100501015	450V24A Cross section:2.5mm ² L16.7/W18/H5.8mm		
16	Compact splicing connector	221-412	100501016	400V/32A Cross section:4mm ² L19.1/W13.1/H9.9mm		Material: PC+PA66
17	Compact splicing connector	221-413	100501017	400V/32A Cross section:4mm ² L19.1/W18.6/H9.9mm		Material: PC+PA66
18	Compact splicing connector	221-414	100501018	400V/32A Cross section:4mm ² L19.1/W24.3/H9.9mm		Material: PC+PA66
19	Compact splicing connector	221-415	100501019	400V/32A Cross section:4mm ² L19.1/W29.9/H9.9mm		Material: PC+PA66

20	Compact splicing connector	221-662	100501049	450V/40A Cross section: 6mm ² L21.5/W15.6/H11mm		
21	Compact splicing connector	221-663	100501050	450V/40A Cross section: 6mm ² L21.5/W22.1/H11mm		
22	Compact splicing connector	221-664	100501051	450V/40A Cross section: 6mm ² L21.5/W22.1/H11mm		
23	Compact splicing connector	221-665	100501052	450V/40A Cross section: 6mm ² L21.5/W35.1/H11mm		
24	Compact splicing connector	222-412	100501020	400V/32A Cross section:2.5mm ² L20.5/W12.4/H14.5 mm		Available in PC material 
25	Compact splicing connector	222-413	100501021	400V/32A Cross section:2.5mm ² L20.5/W17/H14.5 mm		Available in PC material 
26	Compact splicing connector	222-414	100501022	400V/32A Cross section:2.5mm ² L20.5/W20.85/H14.5 mm		Available in PC material
27	Compact splicing connector	222-415	100501023	400V/32A Cross section:2.5mm ² L20.5/W26.6/H14.5 mm		Available in PC material 
28	Compact splicing connector	222-418	100501024	400V/32A Cross section:2.5mm ² L20.5/W40 /H14.5mm		
29	Compact splicing connector	222-422	100501025	400V/32A Cross section:4mm ² L39/W13.5 /H14.5mm		Available in Colors handles 
30	Compact splicing connector	222-423	100501026	400V/32A Cross section:4mm ² L39.5/W18.6 /H14.5mm		
31	Compact splicing connector with DIN Rail Feet	222-211	100501027	400V/32A Cross section:4mm ² L43/W8/H31mm		
32	Compact splicing connector with DIN Rail Feet	222-212	100501028	400V/32A Cross section:4mm ² L43/W13/H31mm		
33	Compact splicing connector with DIN Rail Feet	222-213	100501029	400V/32A Cross section:4mm ² L43/W18/H31mm		
34	Compact splicing connector	222-P421	100501030	400V/32A Cross section:4mm ²		 Can joint together
35	Compact splicing connector	222-P422	100501031	400V/32A Cross section:4mm ²		 Can joint together
36	Compact splicing connector	222-P423	100501032	400V/32A Cross section:4mm ²		 Can joint together
37	Splicing connector	222-T11	100501057	0.08-4mm ²		
38	One input two out Splicing connector	222-F12	100501058	0.08-4mm ²		Other color: Grey Handle color: Orange, Blue, Yellow
39	One input three out Splicing connector	222-F13	100501059	0.08-4mm ²		Other color: Grey Handle color: Orange, Blue, Yellow
40	One input four out Splicing connector	222-F14	100501060	0.08-4mm ²		Other color: Grey Handle color: Orange, Blue, Yellow
41	One input five out Splicing connector	222-F15	100501061	0.08-4mm ²		Other color: Grey Handle color: Orange, Blue, Yellow

42	Two input four out Splicing connector (Assembled from 2 pcs 222-F12)	222-F24	100501062	0.08-4mm2		Other color: Grey
43	Two input six out Splicing connector (Assembled from 2 pcs 222-F13)	222-F26	100501064	0.08-4mm2		Other color: Grey
44	Two input eight out Splicing connector (Assembled from 2 pcs 222-F14)	222-F28	100501065	0.08-4mm2		Other color: Grey
45	Two input ten out Splicing connector (Assembled from 2 pcs 222-F15)	222-F210	100501066	0.08-4mm2		Other color: Grey
46	Three input six out Splicing connector (Assembled from 3 pcs 222-F12)	222-F36	100501067	0.08-4mm2		Other color: Grey
47	Three input nine out Splicing connector (Assembled from 3 pcs 222-F13)	222-F39	100501068	0.08-4mm2		Other color: Grey
48	Push-in Connector	FCT-252	100501033	L19.5/W11/H10mm		
49	Push-in Connector	FCT-253	100501034	L20/W14.3/H9.8mm		
50	Push-in Connector	FCT-254	100501035	L20/W17.5/H9.8mm		
51	Push-in Connector	FCT-255	100501036	L19.5/W21.5/H9.8mm		
52	Lighting connector	224-101	100501037	400V/24A Cross section:2.5mm ² L20.5/W8.5/H15.5 mm		Available in PC material 
53	Lighting connector	224-112	100501038	400V/24A Cross section:2.5mm ² L20.5/W10/H15.5 mm		Available in PC material 
54	Lighting connector	224-201	100501039	400V/24A Cross section:2.5mm ² L42/W8.5/H15.5 mm		Available in PC material 
55	Mounting Carrier for 222 series	222-500	100501040	L66/W26 mm		
56	Mounting Carrier with Strain relief plate for 222 series	222-500+222-505	100501041	L67.5/W52 mm		
57	Mounting Carrier for 773 series	773-322	100501042	L66/W26 mm		
58	Mounting Carrier with Strain relief plate for 773 series	773-322+222-505	100501043	L67.5/W52 mm		
59	Strain relief plate	222-505	100501044	L67.5/W52 mm		
60	Carrier for fixing on panel	222-41	100501045	For 222-412, 222-413, 222-414, 222-415, 222-418		
61	Carrier for fixing on panel	222-42	100501046	Carrier for 222-422, 222-423		
62	DIN Rail Carrier	222-K41	100501047	For 222-412, 222-413, 222-414, 222-415, 222-418		
63	DIN Rail Carrier	222-K42	100501048	Carrier for 222-P421		
64	DIN Rail Carrier	222-Z43	100501063	For 222-T11 F12 F13 F14 F15 P421 P422 P423		

Fan filter
Cabinet ventilation system
230VAC 240VAC



No.	ITEM	PART NO.	Order No.	DETAIL	PIC.	REF.
Cabinet Fan and Filters, standard color RAL7032, can custom make RAL7035. OEM service is supported						
1	Air Filter Panel	FK3321.300	102101001	Installation size: 92x92 mm		Surface size:116.5x116.5 mm For 92mm Fan IP54
2	Fan and Filter 230V, 110V	FK3321.230	102102001	Installation size: 92x92 mm		Surface size:116.5x116.5 mm Equipe with Fan size: 92x92x25 mm IP54
3	Air Filter Panel	FK3322.300	102101002	Installation size: 124x124 mm		Surface size:148.5x148.5 mm For 120mm fan IP54
4	Fan and Filter 230V, 110V	FK3322.230	102102002	Installation size: 124x124 mm		Surface size:148.5x148.5 mm Equipe with Fan size: 120x120x38 mm IP54
5	Air Filter Panel	FK3323.300	102101003	Installation size: 177x177 mm		Surface size:204x204 mm For 120mm fan IP54
6	Fan and Filter 230V, 110V	FK3323.230	102102003	Installation size: 177x177 mm		Surface size:204x204 mm Equipe with Fan size: 120x120x38 mm IP54
7	Air Filter Panel	FK3325.300	102101005	Installation size: 224x224 mm		Surface size:255x255 mm For 172mm fan IP54
8	Fan and Filter 230V, 110V	FK3325.230	102102004	Installation size: 224x224 mm		Surface size:255x255 mm Equipe with Fan size: 172x150x51 mm IP54
9	Air Filter Panel	FK3326.300	102101007	Installation size: 290x290 mm		Surface size:320x320 mm For 225mm fan IP54
10	Fan and Filter 230V, 110V	FK3326.230	102102005	Installation size: 290x290 mm		Surface size: 320x320 mm Equipe with Fan size: 225x225x80mm IP54
11	Air Filter Panel with Rubber seal	FK9803.300	102101009	Installation size: 122x122 mm		Surface size: 148.5x148.5 mm For 120mm fan IP54
12	Fan and Filter with Rubber seal 230V, 110V	FK9803.230	102102006	Installation size: 122x122 mm		Surface size: 148.5x148.5 mm Equipe with Fan size: 120x120x38 mm IP54
13	Air Filter Panel with Rubber seal	FK9804.300	102101010	Installation size: 175x175 mm		Surface size:: 204x204 mm For 172mm fan IP54
14	Fan and Filter with Rubber seal 230V, 110V	FK9804.230 (17251)	102102007	Installation size: 175x175 mm		Surface size:204x204 mm Equipe with Fan size: 172x150x51 mm IP54
15	Air Filter Panel with Rubber seal	FK9805.300	102101011	Installation size: 223x223 mm		Surface size:255x255 mm For 172mm fan IP54
16	Fan and Filter with Rubber seal 230V, 110V	FK9805.230	102102008	Installation size: 223x223 mm		Surface size: 255x255 mm Equipe with Fan size: 172x150x51 mm IP54
17	Air Filter Panel with Rubber seal	FK9806.300	102101012	Installation size: 283x283 mm		Surface size: 320x320 mm IP54